

PATTON


Enabling solutions for voice, video & data networking

VoIP Gateways, Routers & IADs



Analog: S-WTA

- Dual FXS VoIP IAD
- SIP VoIP + WiFi access point
- Full networking features and manageability

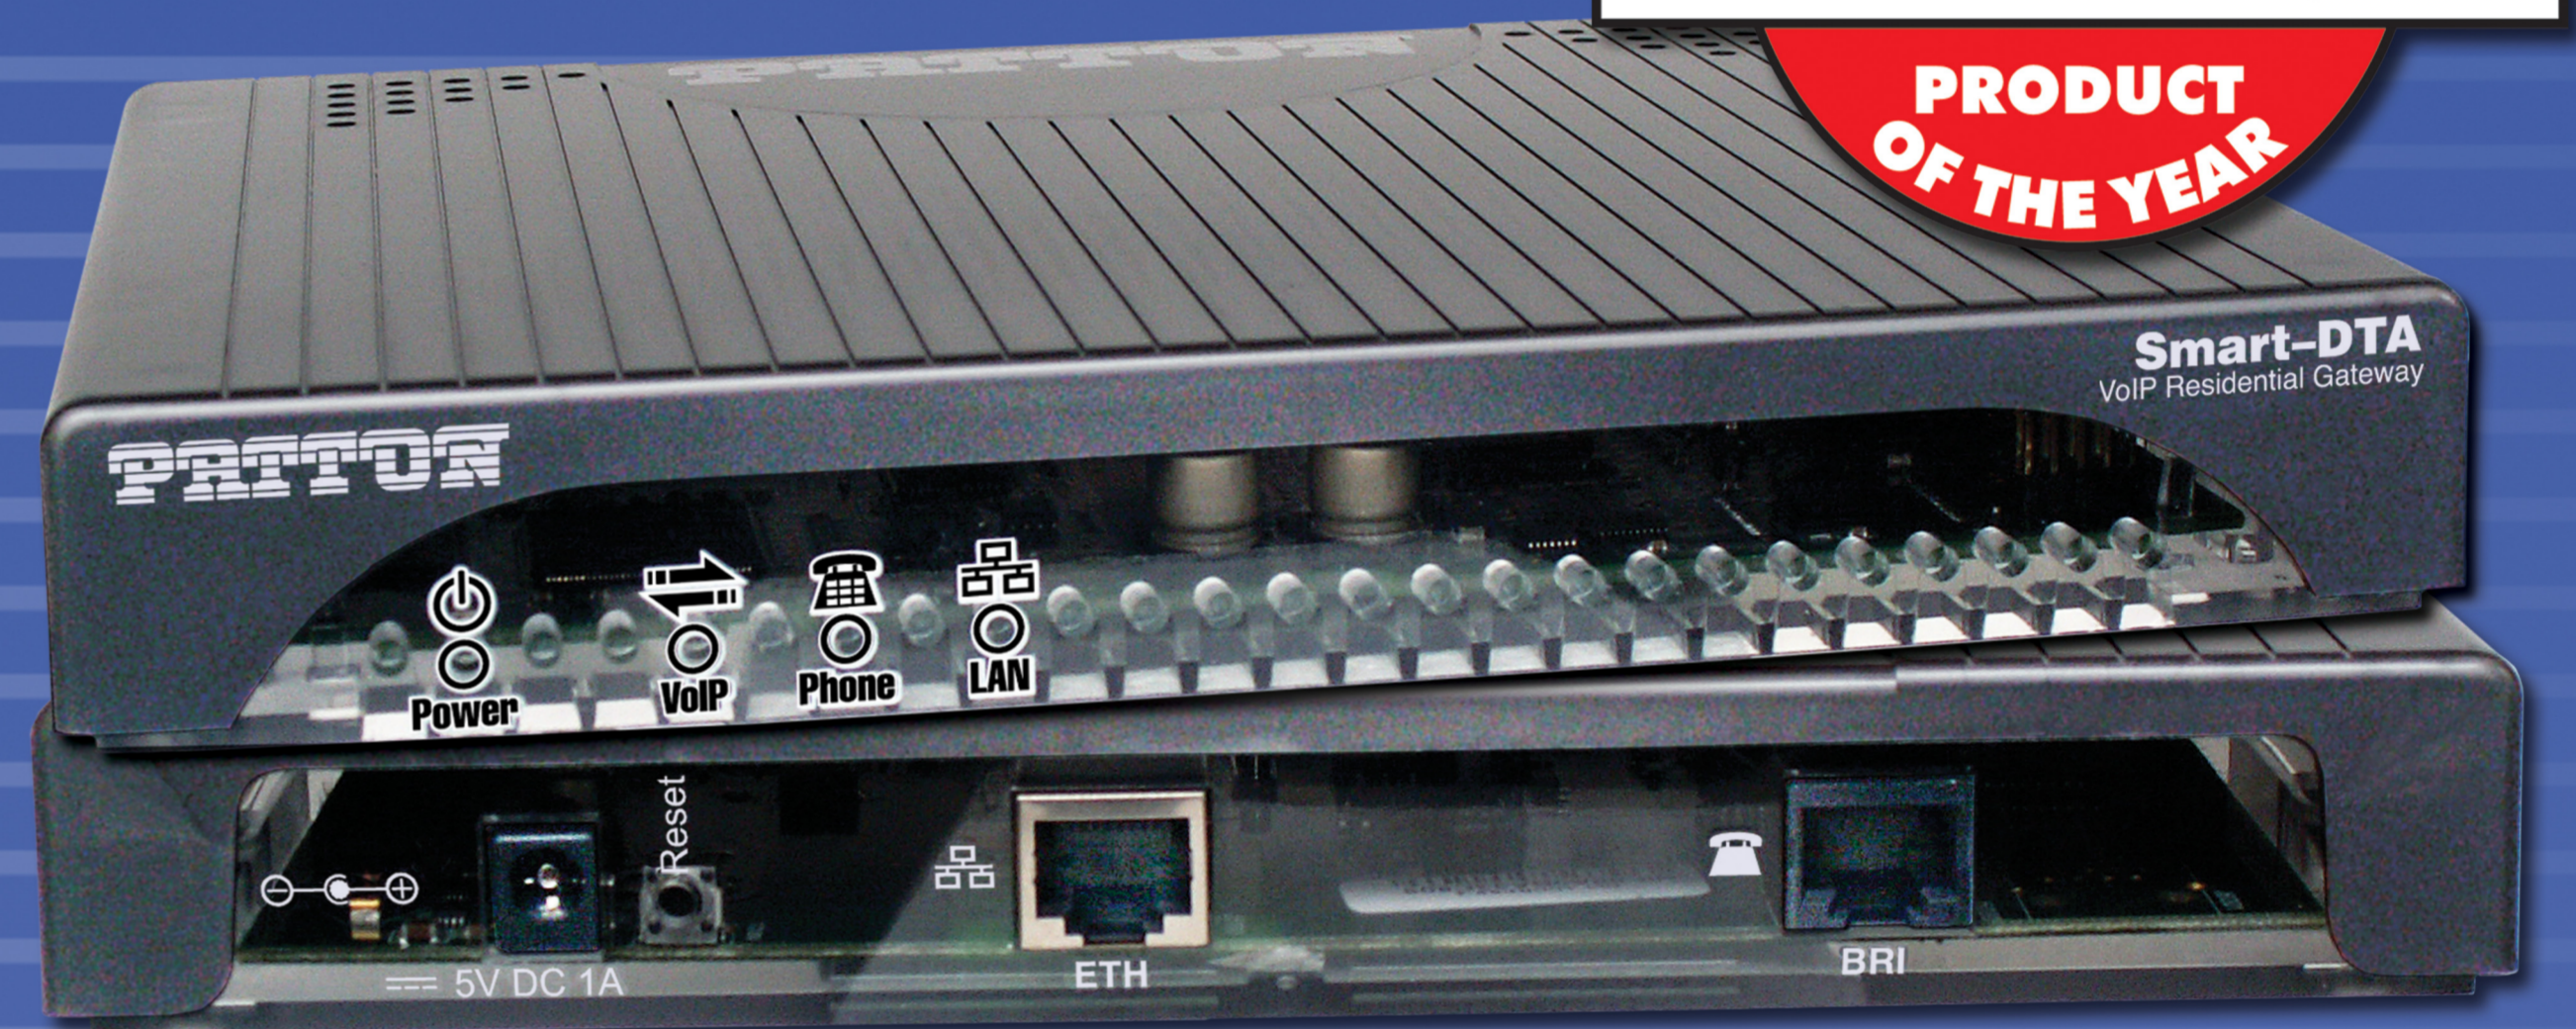

BRI: S-DTA

- Single BRI S0 Gateway
- SIP or H.323 VoIP
- T.38 with Super G3
- Full networking features and manageability



PRI: SmartNode 4960 Series

- 4/E1/T1/PRI ports with up to 120 VoIP channels and T.38
 - Local call switching and fail-over routing
 - Dual Gigabit Ethernet ports
- Active QoS access router with Voice-over-VPN acceleration
- High precision clock option for DECT systems
 - Integrated xDSL options



BRI: SmartNode 4630/4650 Series

- 8 or 4 channel ISDN VoIP IAD with T.38 fax
- Switches calls between any 5 BRI S0 ports, SIP and H.323
- Use with optional Voice-over-VPN for secure communications
- High precision clock option for DECT systems
 - Integrated xDSL options



Analog: SmartNode 4900 Series

- 12, 16, 24 or 32 FXS or FXO ports
- Simultaneous voice or T.38 fax calls on all ports
 - Dual Ethernet ports with auto MDI-X
- Use FXS models for call center applications
- Use FXO models for PSTN analog trunking