



SmartNode™ Branch eXchange (SNBX)

Supporting up to 64 simultaneous calls, the SNBX appliance is ready to load the operating system and software-based IP PBX of your choice—bringing you Unified Communications without breaking the bank.

Choose Your Own Software

Load the operating system and software-based IP PBX of our choice.

Up to 64 Calls

Provides up to 128 simultaneous calls without transcoding, 64 calls with transcoding and supports up to 500 extensions.

Monitoring and Management

Web GUI for device monitoring and application management. Also includes built-in SmartNode Gateway configurator.

Fits Your Network

BYOP (Bring your own phone)—Choose your own IP phones or softphones; no vendor lock-in.

Keep Your Existing Equipment—Add a SmartNode Gateway to connect existing analog/ISDN equipment.

SIP Trunks or PSTN—Save on monthly call costs using SIP Trunks or receive and make calls via the standard PSTN using SmartNode Gateways and VoIP Routers.

The **SNBX** is an appliance ready to load the operating system and software-based phone system of your choice. The SNBX supports 64 simultaneous calls with RTP Relay and Transcoding, and up to 500 extensions.

The SNBX web GUI provides device monitoring and application management; plus, is open to 3rd party applications. No keyboard or mouse is required since the web GUI can be accessed from anywhere.

The SNBX fits *your* network by supporting most software-based IP PBX, IP


phone or softphone. You can keep your trusted PSTN lines or analog/ISDN phone equipment by simply adding Patton's SmartNode Gateways. Or you can provide secure, prioritized VoIP by using a SmartNode VoIP Router to connect to your SIP trunks. Setup is quick and easy as the SNBX provides a built-in SmartNode configuration tool.

Visit www.patton.com/smartnode for more information on SmartNode products.




Application Diagram

PSTN

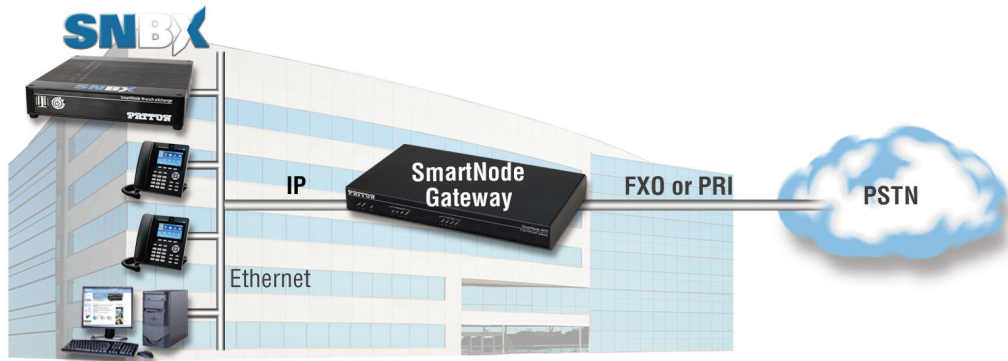

SIP Trunks

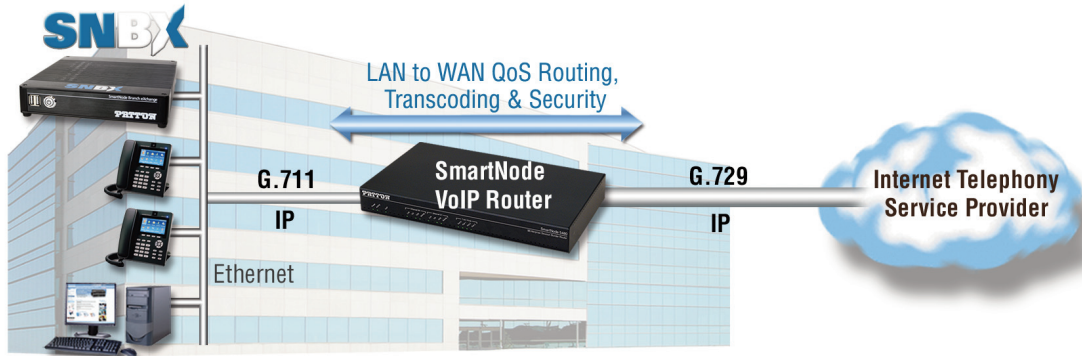

Hardware Specifications*

Processor

Intel Dual Core Atom with Hyper Threading 1.8 Ghz

Memory

4GB of DDR3 RAM
250GB hardrive

Ethernet

1 10/100/1000 Ethernet Port

Dimensions

1.4 x 7.5 x 7.7 in.

Weight

2.8 lbs. (1.27 kg)

External Power Supply

12 Volt 5 Amp

Capacity

64 calls with Transcoding • 128 with RTP Relay • 20 cps • 100 CAPS

* Specifications subject to change without notice.

PATTON[®]
Let's Connect![™]

07MSNBX-DS1

Patton is a registered trademark and the terms SmartNode, DownStreamQoS, and SessionRouter are trademarks of Patton Electronics Company in the United States and other countries.

Patton Electronics Co.
7622 Rickenbacker Drive
Gaithersburg, Maryland 20879
USA
Phone +1 301 975 1000
Fax +1 301 869 9293
E-mail sales@patton.com
Web www.patton.com

Patton-Inalp Networks AG
Meriedweg 7
CH-3172 Niederwangen
Switzerland
Phone +41 (31) 985 25 25
Fax +41 (31) 985 25 26
E-mail sales@inalp.com
Web www.inalp.com

Patton Hungary Zrt
Gábor Dénes utca 4.
Infopark Building C
Budapest H-1117
Hungary
Phone +36 1 439 4840
Fax +36 1 439 4844
E-mail ce@patton.com
Web www.patton.com