



IP Network Camera Extender

Model 1173

Patton's Plug-and-Play IP Network Camera Extender enables users to place their IP cameras over fifteen times farther than the standard distance of 328 feet (100 meters) over standard phone grade twisted pair

Extends IP Video over 15 times its natural limitations

Extend high resolution IP Video up to 6,000ft over telephone grade twisted pair cabling

Use with any Camera with an Ethernet interface

Fully compatible with any IP cameras and its managing software

Transparent to IP Video schemes

Fully transparent to compression schemes such as WMV, MPEG-4 and MJPEG

Flexible Installation Options

Wall or DIN mountable

No Configuration Required

Plug-and-Play

Ruggedized

Housed in a metal enclosure with an operating temperature of -10 to 70°C

The Patton Model 1173 IP Network Camera Extender enables streaming video rates of up to 50 Mbps over ordinary phone grade twisted pair. Unlike wireless, wire-line extension provides a secure and reliable connection without needing a clear line of sight. Dependable performance and streaming rates up to 50 Mbps, the Model 1173 is the perfect solution for transporting high resolution security video footage.


While the device is plug-and-play, the Model 1173 contains three user-selectable settings for line rates providing for flexibility in achieving the optimal video resolution-distance combination. The Model 1173 is completely transparent to protocols, codecs, and applications ensuring compatibility with any IP camera and its management software.

Visit www.patton.com for more information.

Applications

The Model 1173 IP Network Camera Extender's are ideal for delivering IP Video links to remote camera installations that are beyond the 328-foot (100-meter) distance limit of Ethernet. The 50 Mbps line rate eliminates bandwidth concerns previously experienced with other copper wired transmission

technologies. By utilizing existing voice grade copper pairs, alarm circuits, etc. the expense and hassle of installing new cabling is eliminated.

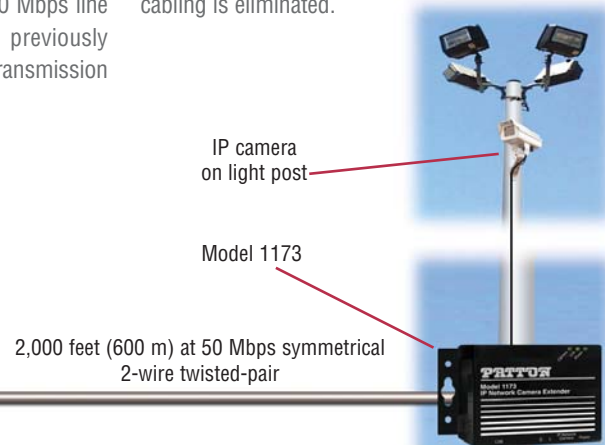

Line Rates (AWG 24/0.5 mm)	
Downstream in Mbps	Distance in feet (meters)
4	6,000 (1,830)
16	4,000 (1,200)
50	2,000 (610)

Ordering Information

Model 1173R/EUI-2PK: IP Network Camera Extender Kit; -10° to 70°C ; UI

Model 1173R/CC/EUI-2PK: IP Network Camera Extender Kit; -10° to 70°C , conformal coated (humidity 85% condensing from -10 to +35°C); UI

Specifications

Line interface: RJ-45 (pin 4 = ring; pin 5 = tip)
Ethernet interface: 8-position shielded RJ-45. Auto-sensing 10/100Base-T with half or full-duplex operation. DIP switch capable of disabling 100-Mbps full-duplex for equipment that does not support 802.3X (Pause Packets)
Protocol: Transparent to high layer protocol. Supports 802.1Q VLAN tagging
Modulation: Quad Amplitude Modulation (QAM) 4-band
Duplexing Method: FDD (Frequency Division Duplexing)
Frequency Range: Up to 0–12 MHz
Line Rate: 50 Mbps

Temp: -10 to 70°C,
Compliance: FCC Part 15A, CE Mark, EMC Directive 89/336/EEC, Low-Voltage Directive 73/23/EEC
Power Supply: External AC and DC options: 120 VAC, and universal input (UI)—100–240 VAC, or optional -48 VDC, -24 VDC, or -12 VDC
Humidity (Standard): Up to 90% non-condensing
Humidity (Conformal Coated): 85% condensing humidity from -10 to 35°C
Dimensions: 1.5H x 4.13W x 3.75D in. (3.81H x 10.5W x 9.53D cm)
Weight: 0.4 lbs (0.18 kg) without power supply

PATTON

Network Access & Connectivity Solutions for Enterprise, Carrier & Industrial Applications

Patton Electronics—a leader in the production of network access and connectivity products—is building on its expertise in integrated network access, transmission, IP and Frame Relay technologies and leading in the development of right-priced products to simplify human and machine access to the global network.

The Patton brothers, Bobby and Burt, founded Patton Electronics in 1984, while students in college. Over the succeeding 20+ years, Patton has taken those simple beginnings and expanded into a multi-national manufacturing company that today employs more than 180 people and provides a product line in excess of 1000 items.

For your next project that needs to meet aggressive price points, while delivering high performance results, call on Patton. We're ready to deliver!



EtherBITS™
Industrial Device Networking



CopperLink™
Ethernet Extenders
Going the Distance



TeleMatch™
Baluns
Audio, Video and Data Baluns



SafeGuard™
Surge Protectors
Data/Line Protectors & Isolators



IPLink™
Routers
WAN Link-Up For Less



DialFire™
Dial-Up Access
More Dial-up, Less Dollars



QuikConnect™
Line Drivers
Line Drivers & Short Range Modems



NanoSery™
Industrial Computers
Ultra-Miniature Computers



EnviroNET™
Hardened Networking
Ruggedized Data & Tele Comms



MicroPak™
Converters
Interface and Media Converters



SmartNode™
Voice-Over-IP
More Than Just Talk



ForeFront™
WAN Aggregation
TDM & IP Aggregation

PE-Inalp Networks Private Ltd
An Associate of
PATTON®
Electronics Co., USA

Old No. 14 and New No.6,
Brahadambal Road,
Nungambakkam High Road
Chennai: 600 034, India
Phone **+91 44 45490395/6/7**
Fax **+91 44 4549.0394**
Email **sales@patton.co.in**
Web **www.patton.co.in**

Patton-Inalp Networks AG
PATTON
inalp networks

Meriedweg 7
CH-3172 Niederwangen
Switzerland
Phone **+41 (31) 985 25 25**
Fax **+41 (31) 985 25 26**
E-mail **sales@inalp.com**
Web **www.inalp.com**

Patton Electronics Co.
PE PATTON
Electronics Co.

7622 Rickenbacker Drive
Gaithersburg, Maryland 20879
USA
Phone **+1 301 975 1000**
Fax **+1 301 869 9293**
E-mail **sales@patton.com**
Web **www.patton.com**

07M1173-DS2

Patton is a registered trademark, and TrinityAE and Visuality are trademarks of Patton Electronics Company in the United States and other countries.