



# OnSite™ CPE

## Model 3088A

*The Model 3088A is a low cost, manageable and software upgradeable G.SHDSL.bis CPE designed for service providers needing transparent last-mile telecom and data service delivery.*

### nx64 Rates to 5.7 Mbps

*With multiple full-duplex symmetric rates available, users select the bandwidth option they need.*

### Low Cost Fixed Interfaces

*Multiple interface options to choose from: E1 (G.703/G.704), X.21, V.35, and RS-232.*

### Local and Remote Loopbacks

*Loopbacks add a powerful troubleshooting tool for determining line quality*

### Software Upgradeable

*Software upgrades make it easy to keep the OnSite CPE in service for years*

### Plug 'n' Play

*Just plug them in and the link comes up in seconds. Set the unit to use G.Handshaking and the selection of optimal link speeds can also be done automatically.*

### Local and Remote Console

*With remote console, any Patton G.SHDSL modem (3096RC or 3088A) can be used to manage the remote CPE modem*

Patton's Model 3088A G.SHDSL.bis OnSite CPE is the perfect choice for users or service providers who need high-speed dedicated network connections. Based on the ITU and ETSI G.SHDSL G.991.2 standard, the 3088A enables providers to extend their reach-and-range by delivering rate-adaptive nx64 symmetrical speeds up to 5.7 Mbps—all over a single pair of wires.

The OnSite 3088A uses Patton's Plug 'n' Play features to remove any CPE configuration issues when used with any Patton CO concentration solution, even another 3088A CPE. Just set the units to their default mode and plug them in. The remote modem configures automatically and the link is up and running in seconds. With support for remote console link

configuration changes and operating statistics are available via the out-of-band EOC channel. Remote and local loopback adds to the manageability of the link. Use remote console when deploying OnSite CPEs either back-to-back or with a ForeFront system to improve the manageability of the CPE.

The Model 3088A is available with V.35, X.21, E1, and RS-232 interfaces. The V.35 and RS-232 interfaces are presented on a female DB-25 connector. The X.21 is presented on a female DB-15 and is DTE/DCE selectable. The E1 interface is presented on an RJ-48C and dual BNC connector. It operates as a channelized interface allowing for fractional E1 configurations (G.703/G.704).

Visit [www.patton.com](http://www.patton.com) for more information.

Model 3088A



RS-232



X.21



E1



V.35




## Applications

- ✓ The Model 3088A OnSite CPE excels in manageability even in point-to-point configurations.
- ✓ Plug 'n' Play automatically configures a remote unit based on parameters stored in the local unit.
- ✓ Secure console lets an operator log into a unit to manage and configure it locally.
- ✓ Remote console makes configuration and management of a remote unit easy over an out-of-band channel.
- ✓ OnSite CPEs are software upgradeable from the console port.
- ✓ When attached to a ForeFront AIS, the 3088A can be managed via an SNMP proxy.

### Extension and Conversion



### Access Concentration

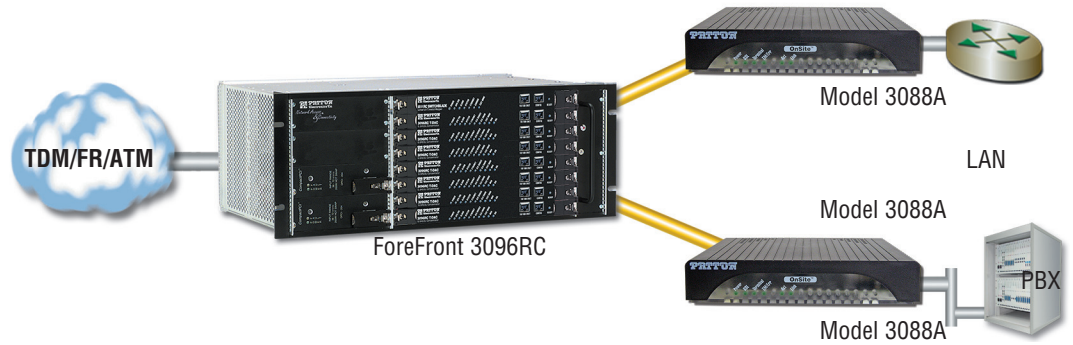

## Specifications

|                               | 3088A/CA   | 3088A/D | 3088A/K | 3088A/A |
|-------------------------------|--|---------|---------|---------|
| <b>DCE Interface</b>          | V.35   | X.21    | E1      | RS-232  |
| <b>Power Supplies</b>         | External power supply options:<br>Universal 90–260 VAC operating from 50–60 Hz;<br>120 VAC/60Hz; 240 VAC/60Hz; -48 VDC |         |         |         |
| <b>Dimensions</b>             | 4.7 x 1.52 x 5.0 in. (10.6 x 3.9 x 12.7 cm)  |         |         |         |
| <b>Testing Parameters</b>     | V.52 511/511E Pattern generator with RDL; LAL  |         |         |         |
| <b>Clocking</b>               | Internal, Network or Receive Recover   |         |         |         |
| <b>Line Coding</b>            | TC-PAM 16 for rates from 64 kbps to 2.3 Mbps; TC-PAM 32 for rates above 2.3 Mbps; Annex A & B                          |         |         |         |
| <b>Line Interface</b>         | RJ-11; Two-wire (single twisted pair)  |         |         |         |
| <b>MTBF</b>                   | 4.7 years  |         |         |         |
| <b>Management</b>             | DIP switch, Telnet console, remote console or proxy SNMP from a Central Office ForeFront                               |         |         |         |
| <b>Front Panel Indicators</b> | LEDs for DSL link, Transmit/Receive data. no signal, loop test errors, and test mode indication                        |         |         |         |
| <b>Compliance</b>             | FCC Part 15A, CE Mark, EMC Directive 89/336/EEC, Low-Voltage Directive 73/23/EEC                                       |         |         |         |
| <b>Environment</b>            | Operating Temperature: 32 to 122°F (0 to 50°C)<br>Humidity: 5 to 90% non-condensing                                    |         |         |         |

## G.SHDSL.bis EFM Products Available


### Model 3088A/I EFM CPE Bridge 2 wire



### Model 3202 EFM Managed Switch 2/4/8 wire



### Model 3296 ForeFront™ EFM Blade

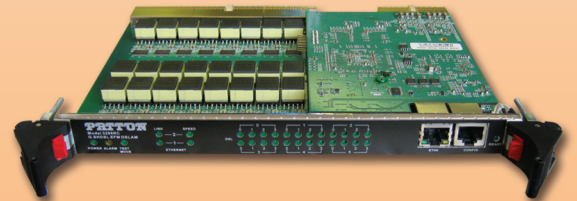

**PATTON**<sup>®</sup>  
Let's Connect!™

**Patton Electronics Co.**  
7622 Rickenbacker Drive  
Gaithersburg, Maryland 20879  
USA  
Phone +1 301 975 1000  
Fax +1 301 869 9293  
E-mail [sales@patton.com](mailto:sales@patton.com)  
Web [www.patton.com](http://www.patton.com)

**PE-Inalp Networks Private Ltd**  
Old No. 14 and New No.6,  
Brahadambal Road,  
Nungambakkam High Road  
Chennai: 600 034, India  
Phone +91 44 45490395/6/7  
Fax +91 44 4549.0394  
Email [sales@patton.co.in](mailto:sales@patton.co.in)  
Web [www.patton.co.in](http://www.patton.co.in)

**Patton-Inalp Networks AG**  
Meriedweg 7  
CH-3172 Niederwangen  
Switzerland  
Phone +41 (31) 985 25 25  
Fax +41 (31) 985 25 26  
E-mail [sales@inalp.com](mailto:sales@inalp.com)  
Web [www.inalp.com](http://www.inalp.com)

07M3088A-DS1

Patton is a registered trademark, and is a trademark of Patton Electronics Company in the United States and other countries.