



# Digital Cross Connect Unit Model 2604 4-Port T1/E1 DACS

Patton's Model 2604 Quad DACS terminates 4 T1/E1 connections and supports Any-to-Any non-blocking cross-connection of 124 DS0s.

### Switch up to 120 64-kbps Channels

Any-to-Any cross-connection of up to 120 data channels over 4 T1/E1 ports

### Versatile T1/E1 Grooming Facilities

DACS, DS0 aggregation, or E1 over T1 transport—all in one box

### Built-in SNMP/HTTP Management

Use your favorite Web or NMS browser to configure and monitor the Model 2604

### Dual-redundant Power Supplies

Uninterrupted operation and service with dual load-sharing power supplies...standard

### Complete Alarm Facilities

Multiple, configurable alarms, reporting via remote SNMP traps, front panel LEDs, 3-contact relay, and NMS pages

### Compact 1U Chassis

Convection cooled design allows stacking with no fans or other moving parts to fail

The Model 2604 DACs is the ideal tool for managing and maximizing the allocation of 64-kbps DS0 channels in under utilized lines. Reducing the cost-per-channel and freeing bandwidth for growth, enterprise customers can concentrate data services from local T1 and E1 lines onto fully utilized local loop WAN uplink connections with complete control and ease of use.

The Model 2604 comes in a sleek, 1U high, 19-in. chassis for convenient installation in standard telco racks. Dual-redundant power supplies ensure uninterrupted operation and service. Four RJ-48C connectors provide standard T1 and E1 interfaces to network and local lines, while RS-232 console and


10/100Base-T ports enable complete control via in-band, out-of-band, and craft management interfaces. A comprehensive set of alarms help network personnel quickly isolate failures and minimize down time.

The Model 2604 Digital Cross Connect Unit combines a robust hardware platform with a rich set of software features to deliver a flexible multiplexing solution for cross-connection, DS0 grooming, and T1 to E1 conversion applications.

For more information, visit us at [www.patton.com](http://www.patton.com).




Special Rates Available  
Call for Details

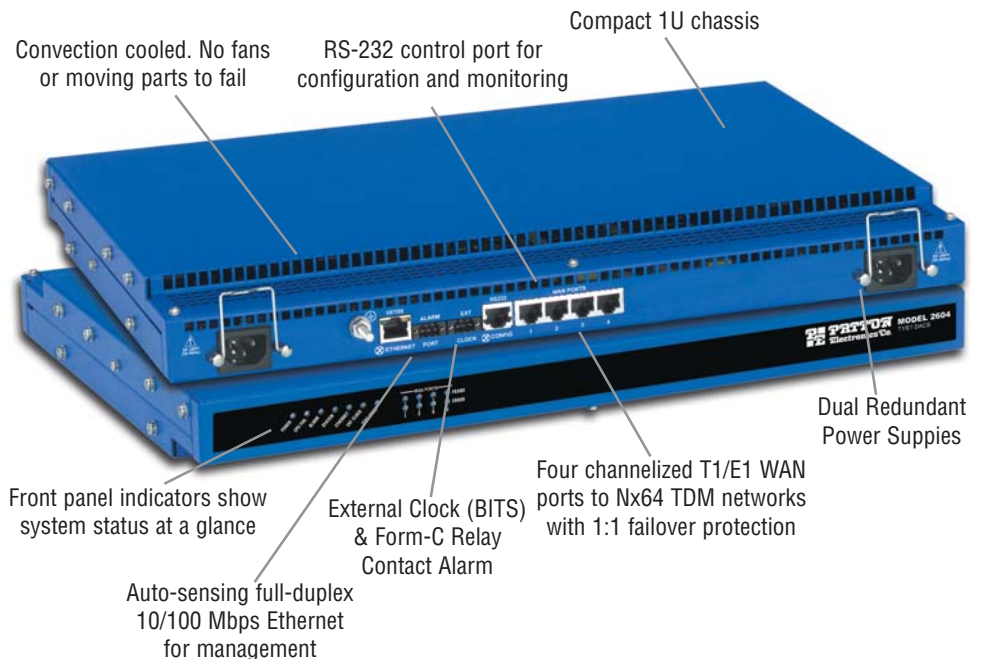

## Applications

The Model 2604 flexible hardware and software architecture enables customers to deploy it in a number of applications ranging from simple local switching of T1/E1 lines, aggregation of DS0 from local T1/E1 lines, or E1 DS0 transport over T1.

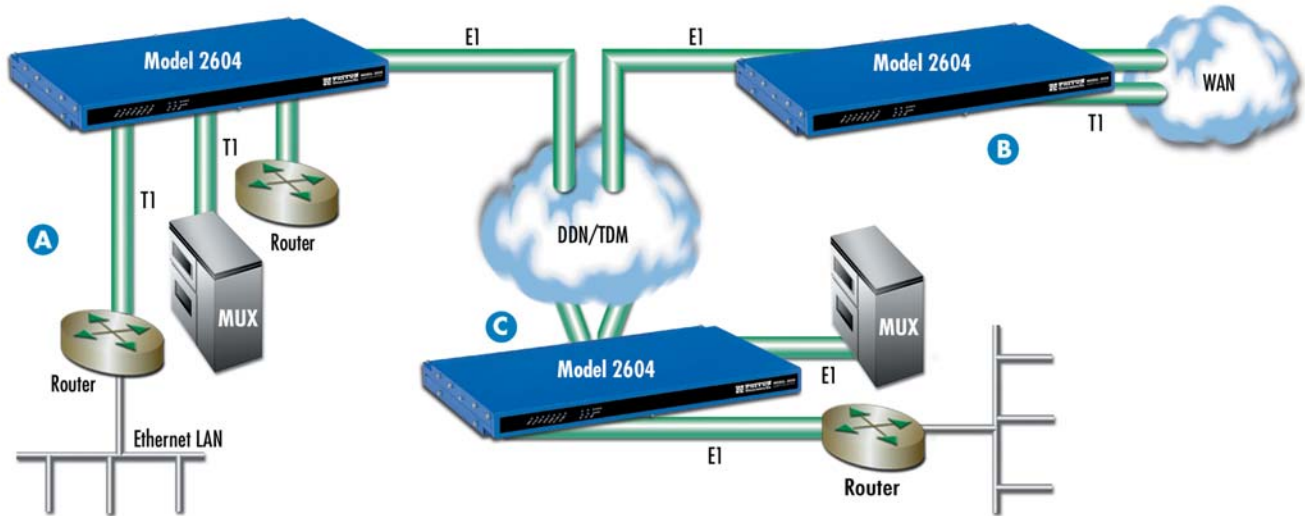

**T1/E1 Aggregation.** Medium-size enterprises can aggregate and groom time slots from up to three partially used local T1/E1 lines onto a single outgoing link. This capability enables routers, MUXs, and other network devices dispersed over the campus area to efficiently use a single T1/E1 line for network access.

**T1/E1 Conversion.** In situations where T1 and E1 networks converge, ports on the Model 2604 can be configured as E1 or T1 interface. This feature provides the capability for mapping and transparently transport T1 64 kbps time slots over E1 lines, and up to 24 E1 channels per T1 line.

**Wide Area Deployment—Local Switching.** In a wide area deployment, medium- and large-size enterprises can use the Model 2604 for local timeslot switching from multiple local or remote T1/E1 lines. The Model 2604 HTTP/SNMP flexible management allows provisioning and monitoring of switching sites from any remote or central location.

## Specifications\*

### WAN ports

4 configurable WAN ports: T1 (AMI/B8ZS line coding), or E1 (HDB3/AMI line coding)

### Ethernet port

10/100Base-T (RJ-45 connector) for management

### WAN Clocking

Internal, Network (from T1/E1 WAN port), External BITS (Building Integrated

Timing Supply) Clock Source via 3-pin terminal block

### Front Panel

Indicators LEDs for power, CPU, system, Ethernet, External clock, test mode, DSL, and WAN ports frame and error status

### Power Supplies

Dual-redundant universal AC/DC (fixed); AC power: 90–264VAC (50/60 Hz); DC power: -36 to -72VDC

### Management Services

HTTP, SNMP, TELNET Ethernet, RS-232 Console Port, SYSLOG Client, Remote Software Upgrade via FTP

### Alarm Reporting

Configurable alarms; Remote SNMP Traps; Front Panel LEDs; 3-Contact Relay (3-pin terminal block)

### Compliance

Safety: UL/CSA per UL1950 (METS) Canadian cMET and CS-03. EMC

Directive 89/336/EEC, Low-Voltage Directive 73/23/EEC (EN 60950), Environment FCC Part 15, CE Mark, CTR12, CTR13, FCC Part 68.

### Environment

Operating temperature: 0–40°C (32–104°F); Humidity: 5–90% non-condensing

### Dimensions

48.25 W x 32.00 D x 4.44 H cm (19.00 W x 12.60 D x 1.75 H inches)

\* Specifications subject to change without notice.

### PE-Inalp Networks Private Ltd

An Associate of

**PATTON**  
Electronics Co., USA

Old No. 14 and New No.6,  
Brahadambal Road,  
Nungambakkam High Road  
Chennai: 600 034, India  
Phone **+91 44 45490395/6/7**  
Fax **+91 44 4549.0394**  
E-mail **sales@patton.co.in**  
Web **www.patton.co.in**

### Patton-Inalp Networks AG

**PATTON**  
inalp networks

Meriedweg 7  
CH-3172 Niederwangen  
Switzerland  
Phone **+41 (31) 985 25 25**  
Fax **+41 (31) 985 25 26**  
E-mail **sales@inalp.com**  
Web **www.inalp.com**

### Patton Electronics Co.

**PATTON**  
**Electronics Co.**

7622 Rickenbacker Drive  
Gaithersburg, Maryland 20879  
USA  
Phone **+1 301 975 1000**  
Fax **+1 301 869 9293**  
E-mail **sales@patton.com**  
Web **www.patton.com**

07MD2604-DS2

Patton is a registered trademark of Patton Electronics Company in the United States and other countries.