



16-Port iDSL T-DAC TDM Concentrator Model 3196RC

The Patton Model 3196RC iDSL T-DAC connects 16 users and supports data rates of 64, 128, and 144 kbps. This high density offering provides affordable access concentration to speed-up first-mile networks.

Up to 16 iDSL ports per card

Get high density per card and lower your cost per port. Easily scale by adding more cards

Speeds of 64, 128, & 144 kbps

Each port is independently selectable for any bandwidth. Distances to 16.4 km/10.1 miles on 0.9 mm/19 gauge copper wire

Standards-based line coding

Uses 2B1Q per ETSI ETR-080 and ANSI T1.601 standards

Built-in timeslot DACS

Perform any-to-any DS0 mapping between any DSL and WAN port in a ForeFront chassis

SNMP/HTTP management

SNMP/HTTP manageable from anywhere in the world including attached CPE units

Complete Alarm Facilities

Configurable alarm reporting with SNMP Traps, front panel LEDs, 3-contact relay, and syslog messages

Patton's Model 3196RC iDSL TDM-Digital Access Concentrator, or iDSL T-DAC provides affordable first-mile access concentration for virtually any low speed network application.

Leverage low cost iDSL technology to offer the right service at the right price. Patton has combined iDSL ports, DACS, and WAN up-links and functions into a powerful system operating on Patton's ForeFront Access Platform.

The Model 3196RC, links up to 16 iDSL circuits to multiple WAN modules and offers complete any-to-any DS0 grooming. Each iDSL port offers user selectable data rates of 64, 128, and 144 kbps. With a built in cross

connect, each data channel or channel group can be multiplexed onto any up-link or other DSL port—even ports on other 3196RC or 3096RC T-DACS in the same chassis. An integrated SNMP/HTTP-based management system allows for easy configuration via any SNMP enabled NMS.


Each 3196RC T-DAC has its own processing capability built in, offering continuous operation even in the presence of multiple network outages. Use the T-DAC in any Patton 2U, 4U or 6U ForeFront Access System and affordably scale up density to network growth requirements.

Visit www.patton.com for more information.



Model 3196RC T-DAC
Provides up to 16 iDSL links at rates of up to 64, 128, and 144 kbps.

TI/E1 rear access card provides any-to-any DS0 connectivity within the Patton ForeFront AIS. Interoperable with other ForeFront front resource cards

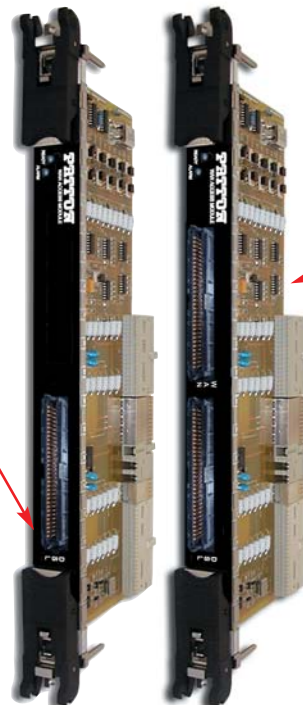


Rear access cards provide any-to-any DS0 connectivity. Additionally, it provides 4, 8, 12, or 16 E1 WAN egress ports.



ForeFront iDSL System Configurations

The ForeFront FullPipe—configured with 3196RC iDSL T-DACs—provides up to 128 iDSL links in a 4U chassis. E1 or STM-1 interface options make data network integration a snap. Combined with Patton's 1082 CPE, it provides the complete solution.

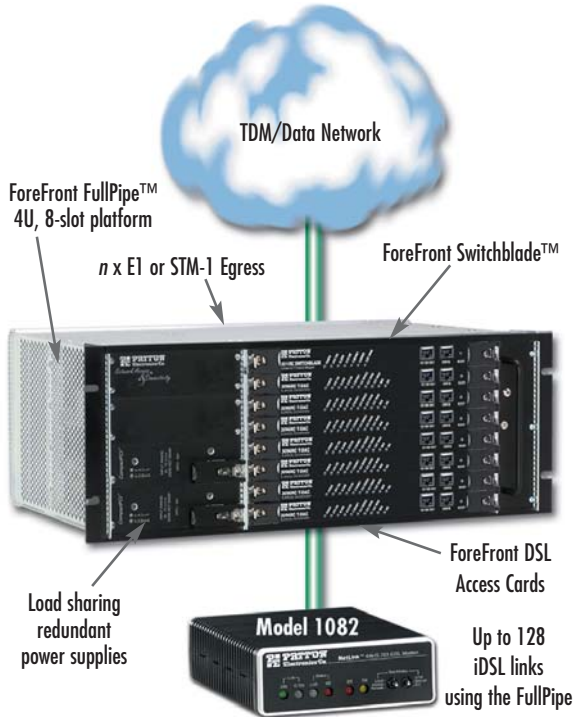

ForeFront HalfPipe™
2U-high, 4-slot cPCI-based access node



ForeFront FullPipe™
4U-high, 8-slot cPCI-based access node



ForeFront Xtreme™
6U-high, 17-slot cPCI-based access node



Specifications

iDSL	2B1Q modulation per European Telecommunications Standards Institute (ETSI) as ETR-080 and American National Standards Institute (ANSI) as T1.601	Front Panel Indicators	LEDs for power, CPU, system, Ethernet, clock source, alarms, test mode, DSL, and transition module WAN ports
iDSL Distance	16.4 km/10.1 miles using 19-gauge (AWG)/0.9-mm copper wire	Management Services	HTTP, SNMP, Telnet Ethernet, RS-232 Console Port, syslog client, remote software upgrades via TFTP
iDSL Connections	Up to 16 ports presented on a 50-pin RJ-21x Telco connector	Alarm Reporting	Configurable alarms, remote SNMP traps, front panel LEDs, 3-Contact Relay (Form-C)
Rear Module	Up-link options include 4, 8, 12, or 16 T1/E1 ports	Compliance	Safety: UL 60950, IEC 60950 (CB Scheme); EMI: FCC Part 15 Class 'A'; Telecom: TIA/EIA/IS-968 (for T1/E1 interfaces); CE
Ethernet Management	Single 10/100Base-T (RJ-45 connector); simultaneous dual redundant operation over backplane	Environment	Operating temperature: 14 to 140°F (-10 to 60°C); Humidity: 5 to 90%, non-condensing
iDSL Modems	Use Patton Model 1082 and 1092A iDSL modems	Dimensions	Front Module: 0.75 H x 10.5 W x 6.3 D in. (1.9 H x 26.7 W x 16.0 D cm) Rear Module: 0.75 H x 10.5 W x 3.15 D in. (1.9 H x 26.7 W x 8.0 D cm)
WAN Clocking	Internal, Network (from T1/E1) or via the system back-plane from any other card		
iDSL Clocking	Provides clocking to the remote NTUs/Modems		

07MD3196-DS3

Patton is a registered trademark and IPLink is a trademark of Patton Electronics Company in the United States and other countries.

PE-Inalp Networks Private Ltd
An Associate of
PATTON
Electronics Co., USA

Old No. 14 and New No.6,
Brahadambal Road,
Nungambakkam High Road
Chennai: 600 034, India
Phone **+91 44 45490395/6/7**
Fax **+91 44 4549.0394**
Email **sales@patton.co.in**
Web **www.patton.co.in**

Patton-Inalp Networks AG

PATTON
inalp networks

Meriedweg 7
CH-3172 Niederwangen
Switzerland
Phone **+41 (31) 985 25 25**
Fax **+41 (31) 985 25 26**
E-mail **sales@inalp.com**
Web **www.inalp.com**

Patton Electronics Co.

PE PATTON
Electronics Co.

7622 Rickenbacker Drive
Gaithersburg, Maryland 20879
USA
Phone **+1 301 975 1000**
Fax **+1 301 869 9293**
E-mail **sales@patton.com**
Web **www.patton.com**