



G.SHDSL.bis Business Router

Model 3210 ILink™ VPN Router

Patton's ILink™ G.SHDSL.bis VPN Router optimizes and secures information by applying VPN encryption and QoS/CoS traffic management to G.SHDSL.bis-based broadband networks.

G.SHDSL.bis

From 192 kbps to 5.7 Mbps over 2-wire, dry copper networks.

Versatile ATM configurations

Support PPPoE, PPPoA as well as RFC 1384/2684.

Dual 10/100 Ethernet Ports

With Dual 10/100 Ethernet, auto-MDI ports easily connect to the LAN and a DMZ.

Per Flow QoS

Traffic rates are set through ACLs that shape and police in ingress and egress directions.

Stateful Firewall Inspection

Stateful firewall inspection is accomplished through ACLs that filter by source and destination IP address, IP port and protocol.

VLAN Tagging

VLAN tagging and processing is configurable on any PVC channel or Ethernet port.

Easy Management

Easily manage the 3210 router via an HTTP/web interface, a CLI accessible via the VT100 console or through Telnet/SSH.

The ILink™ G.SHDSL.bis VPN Router is a next generation business-class G.SHDSL router that addresses both the security and the traffic prioritization needs of enterprises while providing complete broadband integration with existing DSLAM networks. VPN routers enable the secure communication between remote offices, home offices, and mobile users across insecure IP networks such as the Internet. The 3210 takes it one step further and integrates quality of service (QoS).

ILink G.SHDSL.bis VPN Routers implement a comprehensive security environment. By supporting ESP as well as AH, ILink VPN Routers provide data integrity, authentication, anti-replay and data confidentiality to any traffic flow. DES, 3DES, and AES provide standard encryption up to 256 bits. Firewall capabilities of the ILink VPN Routers include


Access Control Lists (ACLs), IP address and port filtering, and protection against Denial of Service (DoS) attacks.

QoS features include ToS/DiffServ marking and the configuration of eight service class tags per IEEE 802.1p/Q. With traffic scheduling and shaping, create dedicated bandwidth guarantees, configurable burst tolerance, and policing to include excess traffic discard. IP fragmentation is configurable to help minimize jitter in traffic flows.

NAT, NAPT, DNS relay, dynDNS, and DHCP server further add to the capabilities of the ILink G.SHDSL VPN Router. For more information, visit us at www.patton.com.




Special Rates Available
Call for Details

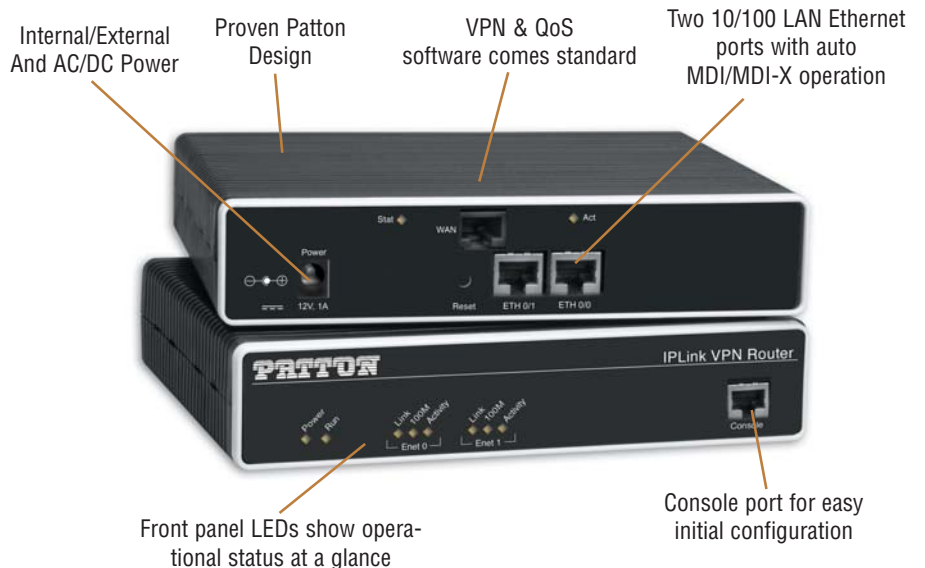

Typical Application

IPLink G.SHDSL.bis VPN Routers are next-generation security appliances that address the needs of business users by integrating QoS into a one-box solution. By including QoS, broadband connections can be put to dual-use without impacting the quality of business data flows.

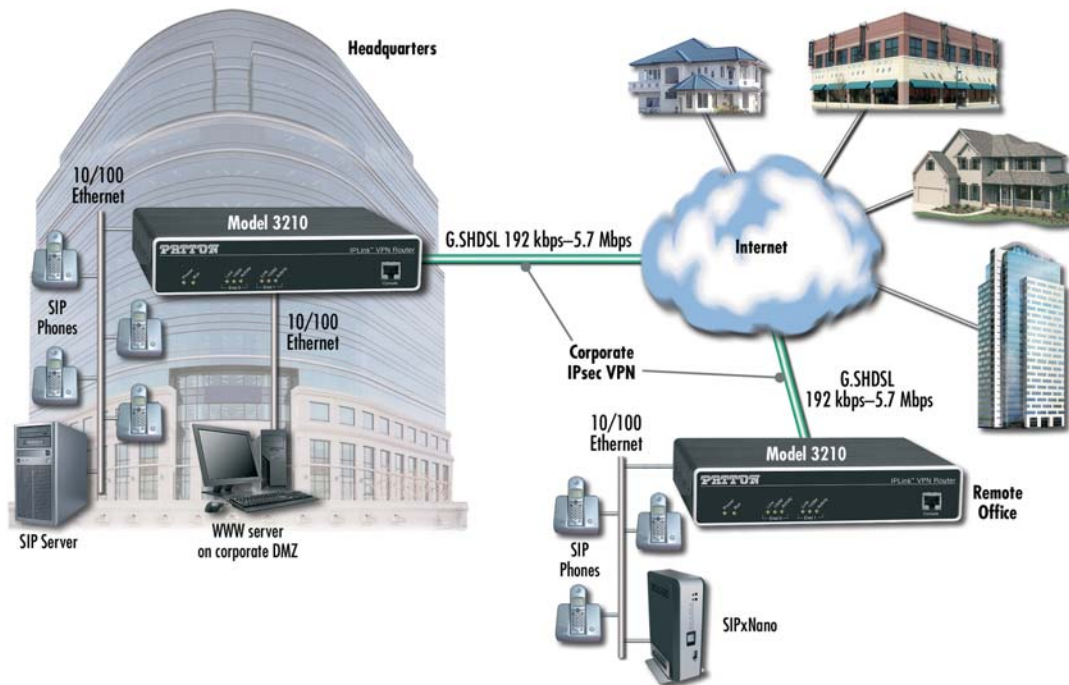

Features

VPN Tunneling secures IP network traversal.

- IPsec encryption supporting AH and ESP provides data integrity, authentication, anti-replay & data confidentiality.

256-bit Encryption protects data.

- With support for DES, 3DES, and AES, data can be encrypted using 56 to 256-bit algorithms, rightsizing security to resources.

QoS/Cos guarantees traffic priority.

- ToS/DiffServ labeling
- Eight service class tags per IEEE 802.1p/Q
- Per flow bandwidth guarantees
- Hierarchical traffic classes
- Configurable burst tolerance
- Excess traffic discard
- Configurable packet and frame fragmentation to minimize jitter.

Specifications

G.SHDSL port

ITU-T G.991.2 including Amendment 2, Annex A, B, F, G; ITU-T G.994.1 (G.Handshake); Classical Internet Protocol over ATM (RFC 1577/2225); PPPoE over ATM (RFC 2516); Routed IP over ATM (RFC 2684/1483); ATM QoS: UBR, CBR, and VBR-rt Support; TR-037 & ILM1 4.0 Auto-config support

LAN Ethernet Ports

Two 10/100BaseT (RJ-45 connector); auto-negotiating; half or full duplex operation with automatic MDI/MDI-X

Management

CLI via Telnet; TFTP for Software upgrade and configuration upload; SNMPv1; HTTP/web browser

Protocols

IP (RFC 741), TCP (RFC 793), UDP (RFC 768), ICMP & ICMP Redirect

(RFC 792), ARP (RFC 826). IP Router with RIPv1 (RFC 1058), RIPv2 (RFC 2453), programmable static routes. Integrated DHCP Server (RFC 2131), DNS Relay (RFC 1631), IEEE 802.1p VLAN Tagging, NAT/NAPT (RFC 1631/2391)

Security

IPsec including AH and ESP. DES, 3DES, and AES encryption. Access Control Lists (ACLs). IP port and address filtering both by source and destination. DoS Detection. Password protected system management with a username/ password for console and virtual terminal.

Power Supplies

External universal 90-260 VAC input or 48 VDC input. (Optional Internal universal 90-260 VAC input.)

Compliance

CE Mark; Safety: UL60950-1, CSA 22.2 6095001, IEC/EN60950-1. Universal AC units are US NRTL Listed; EMC Emissions: FCC Part 15 Class A; EN55022 Class A; EMC Immunity: EN55024

Environment

Operating temp.: 0-40°C (32-104°F); Humidity: 5-80% non-condensing

Dimensions & Weight

7.3W x 1.6H x 6.1D in.
(18.5H x 4.1W x 15.5D cm)
30.5 oz./500g (models with internal power); 24.4 oz./400g (models with external power; no power supply)

* Specifications subject to change without notice.

PE-Inalp Networks Private Ltd

An Associate of

PATTON
Electronics Co., USA

Old No. 14 and New No.6,
Brahadambal Road,
Nungambakkam High Road
Chennai: 600 034, India
Phone **+91 44 45490395/6/7**
Fax **+91 44 4549.0394**
Email **sales@patton.co.in**
Web **www.patton.co.in**

Patton-Inalp Networks AG

PATTON
inalp networks

Meriedweg 7
CH-3172 Niederwangen
Switzerland
Phone **+41 (31) 985 25 25**
Fax **+41 (31) 985 25 26**
E-mail **sales@inalp.com**
Web **www.inalp.com**

Patton Electronics Co.

PATTON
Electronics Co.

7622 Rickenbacker Drive
Gaithersburg, Maryland 20879
USA
Phone **+1 301 975 1000**
Fax **+1 301 869 9293**
E-mail **sales@patton.com**
Web **www.patton.com**

07M3210-DS3

Patton is a registered trademark of Patton Electronics Company in the United States and other countries.