



# Micro-Analog Telephone Adapter

## SmartNode™ M-ATA

*Quickly and easily converts any phone to VoIP for residential and telecommuter applications.*

### Ultra-miniature

*Smallest full-function analog telephone adapter available today!*

### Supports over 20 voice calling features

*Call waiting, call conference, caller ID, hotline, distinctive ring and more!*

### DHCP, PPPoE

*Provides maximum connectivity across firewalls and transport networks.*

### SIP Signaling

*Deploy into any multimedia, interactive, or softswitch network with the leading call and session signaling protocols.*

### Toll Quality CODECs

*Uses G.723 or G.729 for low-bandwidth applications or standard G.711 or G.726 CODECs for toll-quality voice. Uses G.723 or G.729 for low-bandwidth applications or standard G.711 or G.726 CODECs for toll-quality voice.*

### Centralized management

*HTTP/SNMP manageable from any location.*

The SmartNode Micro Analog Telephone Adapter provides connectivity for analog phones to a home, home office or corporate LAN. Connecting to any analog phone or PBX, the SmartNode product is a cost effective solution for small offices and telecommuters to access Internet-based telephone services and corporate intranet systems across established LAN and Internet connections like DSL and cable modems.

The M-ATA provides one Ethernet (RJ-45) port and one FXS (RJ-11) analog phone port for quick and easy interconnection to the local LAN. LEDs show at-a-glance the status of the system, LAN, WAN, and phone ports.


A full suite of IP features (DHCP) are available to maximize universal connectivity. VLAN tagging and prioritization enables voice traffic

to be handled before data traffic, ensuring higher quality voice calls. Support for PPPoE tunneling simplifies extending corporate intranet services to telecommuters.

The user friendly web interface offers two levels of configuration: level one covers basic subscriber-specific parameters, level two offers advanced settings for the transport network. Configuration and firmware can be downloaded from a centralized TFTP or HTTP server.

The M-ATA is SIP standard compliant. Analog phones attached to the SmartNode can use advanced calling features such as call forwarding, caller ID, 3-way calling, call holding, call retrieval, and call transfer.


Visit [www.patton.com](http://www.patton.com) for more information.

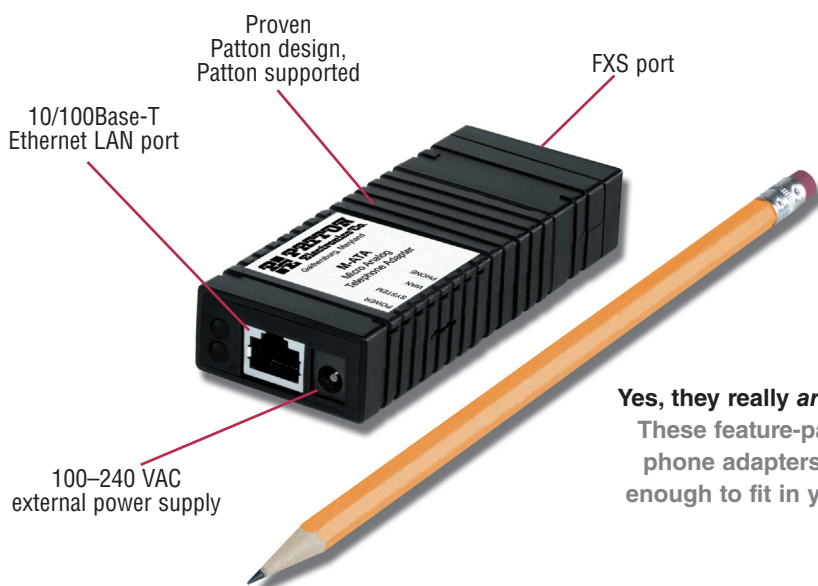

**Yes, they really are this small!**  
These feature-packed telephone adapters are small enough to fit in your pocket!

## Typical Application

Patton's Micro-Analog Telephone Adapter provides seamless access to Internet telephony and data services. The M-ATA connects to any broadband access provider via a cable or xDSL modem.

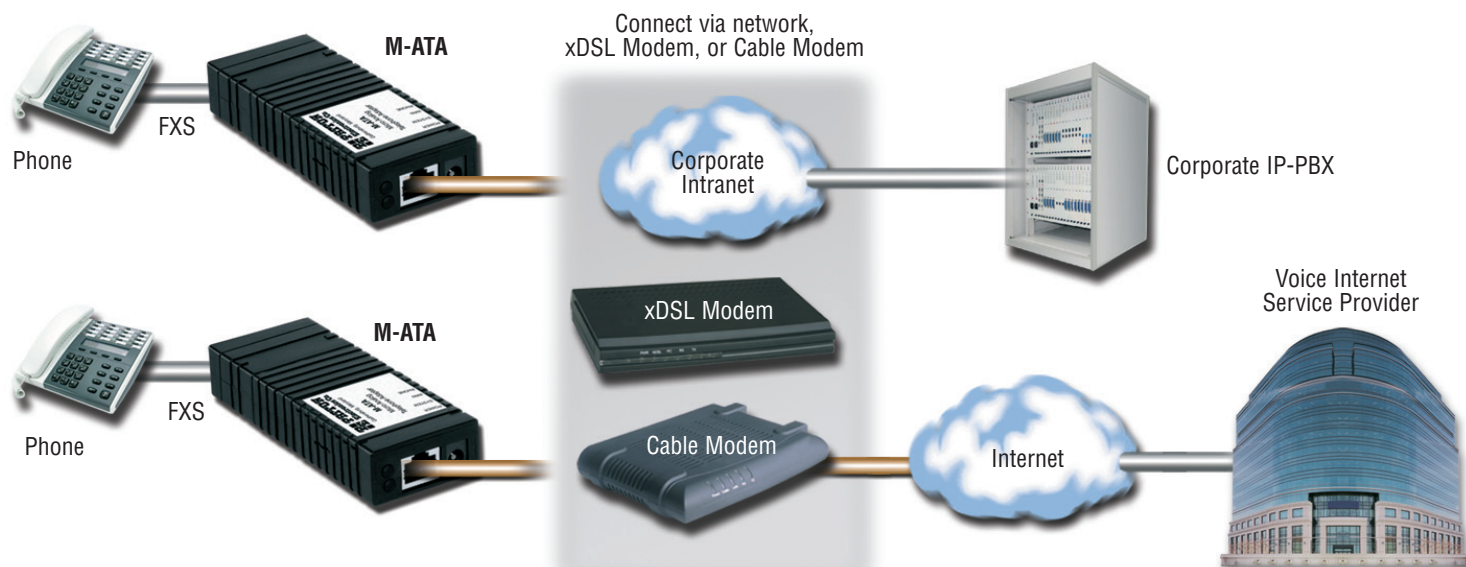

## Specifications\*

### Voice Connectivity

2-wire Loopstart, RJ-11/12 • Short haul loop 1.1 km @3REN • Caller-ID Type-1/2 FSK and ITU V.23/Bell 202 generation

### Connectivity

1 10/100Base-TX Full Duplex/Autosensing Ethernet RJ-45

### Voice Processing (signalling dependent)

SIP • Voice CODECS (G.711 A-Law/ $\mu$ -Law (64 kbps); G.726 (ADPCM 40, 32, 24, 16 kbps); G.723.1 (5.3 or 6.3 kbps); and G.729ab (8 kbps) • G.168 echo cancellation • 2 parallel voice connections • DTMF detection and generation • Carrier tone detection and generation •

Silence suppression and comfort noise • Configurable dejitter buffer • DTMF in-band & out-of-band • Configurable transmit packet length • RTP/RTCP (RFC 1889) • STUN

### Voice Services/Features

Anonymous CallerID block • Call blocking • Call forward - on busy • Call forward - selective • Call forward - unconditional • Call hold/retrieve • Call return • Call transfer - blind • Call transfer - with consultation • Call waiting/retrieval • Caller-ID • Conference drop • Conferencing (3-way calling) • Distinctive ring • Do not disturb • Hotline calling • Incoming CallerID on/off • IP URL dialing • Message

waiting indication • Self-caller ID block • Speed dial • Voicemail message retrieval • Warmline calling

### IP Services

DHCP client • PPPoE • Programmable static routes • ICMP redirect (RFC 792); Packet fragmentation • VLAN support 802.1p/q

### Management

Browser configuration interface • Multilevel security access • TFTP & HTTP configuration & firmware loading • SNMP v2 agent • Syslog support

### Operating Temperature

0–40°C (32–104°F)

### Operating humidity

Up to 90% (non-condensing)

### Power

100–240 VAC (50/60 Hz)

### Compliance

EMC compliance: EN55022 and EN55024 • Safety compliance: EN 50950 • CE compliance • FCC Part 15 Class B

### Dimensions

3.8 L x 1.65 W x 0.75 H in. (9.7 L x 4.2 W x 1.9 H cm.)

### Weight

68 grams (2.4 oz)

## Ordering Information

M-ATA-1/E: Micro Analog Telephone Adapter; 1 x FXS RJ11; 1 x 10/100Base-TX

\* Specifications subject to change without notice.

**PATTON**<sup>®</sup>  
Let's Connect!<sup>™</sup>

**Patton Electronics Co.**  
7622 Rickenbacker Drive  
Gaithersburg, Maryland 20879  
USA  
Phone +1 301 975 1000  
Fax +1 301 869 9293  
E-mail [sales@patton.com](mailto:sales@patton.com)  
Web [www.patton.com](http://www.patton.com)

**Patton-Inalp Networks AG**  
Meriedweg 7  
CH-3172 Niederwangen  
Switzerland  
Phone +41 (31) 985 25 25  
Fax +41 (31) 985 25 26  
E-mail [sales@inalp.com](mailto:sales@inalp.com)  
Web [www.inalp.com](http://www.inalp.com)

**Patton Hungary Zrt**  
Gábor Dénes utca 4.  
Infopark Building C  
Budapest H-1117  
Hungary  
Phone +36 1 439 4840  
Fax +36 1 439 4844  
E-mail [ce@patton.com](mailto:ce@patton.com)  
Web [www.patton.com](http://www.patton.com)

07MMATA-DS10

Patton is a registered trademark, and SmartNode and Let's Connect! are trademarks of Patton Electronics Company in the United States and other countries.