



# Multiport ISDN VoIP IAD with ADSL2+ Interface

## SmartNode 4650

The SmartNode 4650, with up to 5 BRI ports and 8 simultaneous voice channels, is the best way to connect ISDN networks to the world of voice over IP. Using integrated ADSL2+ broadband access, it delivers converged voice and data services that exceed ISDN standards.

### 3/5 Ports BRI ISDN VoIP

3 or 5 ISDN BRI So ports, 4 or 8 low bandwidth voice or T.38 fax calls. Advanced adaptive traffic management and shaping for maximum voice quality. Voice prioritization and DownStreamQoS™.

### ADSL2+ Broadband Access

Complete access router with integrated ADSL2+ WAN interface. Up to 24 Mbps downstream throughput, supporting ATM QoS. Multiple PVC, VLAN, and DSLAM interoperability.

### Full Telephony Features

SessionRouter™ allows flexible call routing and numbering plan adaptations, CLIP/CLIR, hold, AOC transfer, and much more.

### Management & Provisioning

Web-based management, SNMP, command line interface, and auto-provisioning for automated configuration and software upgrades.

### Full VoIP Protocol Support

SIPv2, H.323v4, MGCP/IUA, ISDN, DSS1, QSIG\*, T.38, fax and modem bypass, DTMF relay.

### Outstanding Interoperability

Interoperable for voice and T.38 fax with leading SIP service providers, softswitch vendors, and Asterisk™ IP-PBX.

The SmartNode 4650 series is the CPE of choice for business broadband access providers that want to generate new revenue and acquire new customers through voice-over-IP. Part of the proven market-leading SmartNode VoIP product family, the SmartNode 4650 Series features a 3 or 5 BRI/So port configuration to fit the requirements of small and medium enterprises.

In one single box, it combines broadband access and voice-over-IP, and thanks to IGMP v2/v3 proxy functionality it also delivers video. Throughput ranges up to 24 Mbps downstream are made possible with ADSL2+ Annex A/M & B support, and interoperability covers all major ADSL2+ COs. This is triple-play at your fingertips!

The extra BRI port solves many VoIP network integration problems encountered in real-world installations. The port can syn-


chronize the gateway, and it can be used as a local PSTN breakout port for survivability. It can also be used to shorten the time of number portability—accepting incoming calls through the breakout port while making outgoing calls on the cost-saving VoIP network. With the life-line relay, the port even enables integration of an ISDN emergency terminal powered from the public ISDN.




Special Rates Available  
Call for Details

Like every SmartNode, the 4650 Series models are state-of-the-art VoIP gateways with outstanding interoperability for fax (T.38 and G.711 fallback) and voice. SmartNode products provide seamless network integration, continuous trouble-free operation and cost effective deployment to protect your investments for the future.

Visit [www.patton.com](http://www.patton.com) for more information.

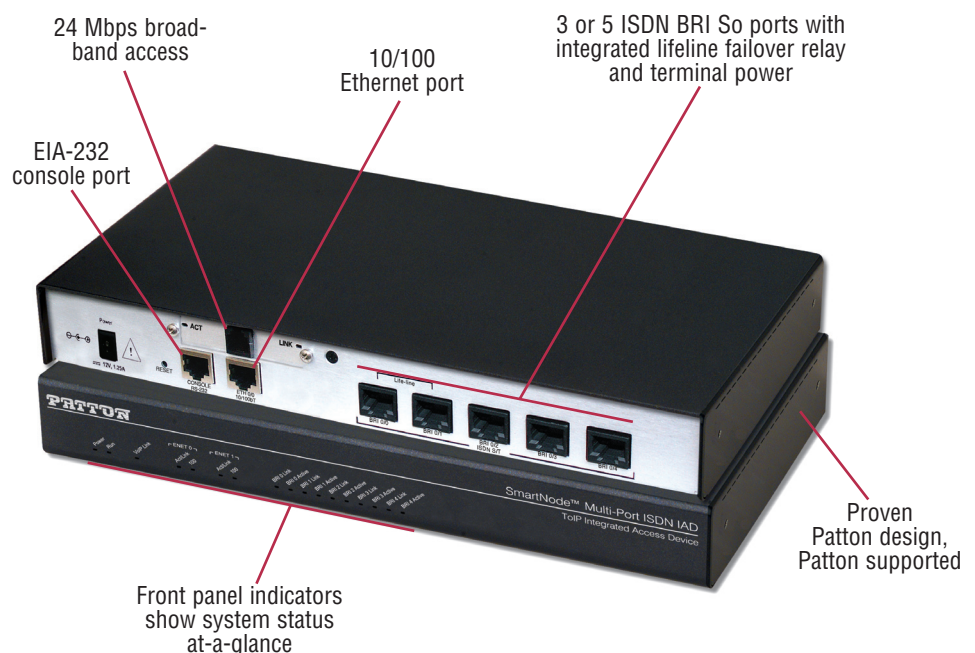

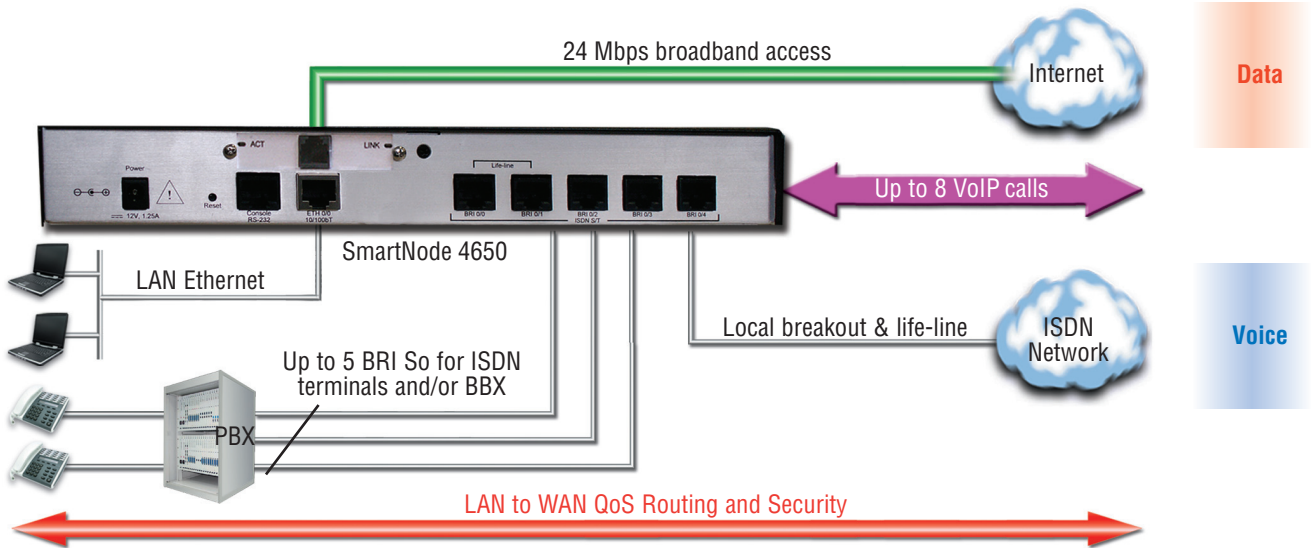

## Specifications\*

### Voice Signaling

SIPv2 • H.323v4 • SIP call transfer, redirect • Overlap or en-bloc dialing • DTMF in-band, out-of-band • Configurable tones

### Broadband Access

ADSL2+ ITU-T G.992.5, Annex A, M, B • Up to 24 Mbps • PPPoE • PPPoA • IPoA • 8 PVCs, each UBR, CBR or VBR-rt selectable • I.610 OAM F4/F5 support • G.994.1 (G.hs)

### Call Routing & Services

Regular expression number matching • Regular expression number manipulation • Least Cost Routing • Number blocking • Short-Dialing • Digit collection • Distribution- and Hunt- Groups

### ISDN

3/5 BRI So ports, RJ-45 • NT/TE configurable per port • Built-in line power on each port (total 4W) • DSS1, Q.921, Q.931, NTT-64 • Point-point and point-multipoint • Lifeline Bypass Relay • Optional QSIG support\*\*

### Voice Processing

G.711m/A-law • G.723.1 (6.4 kbps) • G.729, 729a, 729ab (8 kbps) • G.726 (16, 24, 32, 40 kbps) • G.168 echo cancellation (25 ms) • 4/8 simultaneous low-bandwidth voice or T.38 fax calls • Transparent ISDN data • Silence suppression and comfort noise • Adaptive and configurable dejitter buffer • Configurable packet length

### IP Quality of Service

Voice priority, DownStreamQoS™ • Traffic Management, shaping policing •

IEEE 802.1p, IEEE 802.1Q, 4096 VLANs (Tag insertion/deletion), TOS, DiffServ Labeling

### Connectivity

One 10/100Base-T Ethernet port • Auto-MDIX • DHCP Client • PPPoE Client (multi-session) • IP Multi-Netting, VLAN, Secondary IP • IPv4, RIPv2, ICMP • Dynamic and static NAT and NAPT • ACL Firewall • DNS, DynDNS • DHCP Server • SNTP Client • Optional IPsec VPN (DES, 3DES, AES)

### Management

Web-based GUI • Fully Documented CLI • Telnet and HTTP access • TFTP configuration up- and download • TFTP firmware upgrade • SNMPv1 agent (MIB II and private MIB) • Built-in diagnostic tools • Secure Auto-Provisioning

### Power & Packaging

Desktop metal chassis  
Dimensions: 11.0W x 1.5H x 6.2D in. (28W x 3.9H x 15.7D cm)  
Weight: < 21 oz (600 g)  
Power Consumption < 10 W

### Operating Environment

Operating temperature: 32–104°F (0–40°C)  
Operating humidity: up to 90%, non-condensing

### Compliance

FCC Part 15 Class A (US EMC)  
CE per RTTE 99/5/EC (EMC and LVD)  
Safety—EN60950  
TBR-3 (ISDN BRI/So)

\* Specifications subject to change without notice.

\*\* Requires optional license.

## Ordering Information

Obtain ordering info for this product by using the QR code at right or by contacting:

- web: [http://www.patton.com/products/product\\_detail.asp?id=502&tab=Ordering](http://www.patton.com/products/product_detail.asp?id=502&tab=Ordering)
- email: [sales@patton.com](mailto:sales@patton.com)
- tel: +1 301.975.1000



**Note:** Please indicate country specific power cord at time of ordering

**PATTON**<sup>®</sup>  
Let's Connect!<sup>™</sup>

07MSN4650ADSL-DS6

**Patton Electronics Co.**  
7622 Rickenbacker Drive  
Gaithersburg, Maryland 20879  
USA  
Phone +1 301 975 1000  
Fax +1 301 869 9293  
E-mail [sales@patton.com](mailto:sales@patton.com)  
Web [www.patton.com](http://www.patton.com)

**Patton-Inalp Networks AG**  
Meriedweg 7  
CH-3172 Niederwangen  
Switzerland  
Phone +41 (31) 985 25 25  
Fax +41 (31) 985 25 26  
E-mail [sales@inalp.com](mailto:sales@inalp.com)  
Web [www.inalp.com](http://www.inalp.com)

**Patton Hungary Zrt**  
Gábor Dénes utca 4.  
Infopark Building C  
Budapest H-1117  
Hungary  
Phone +36 1 439 4840  
Fax +36 1 439 4844  
E-mail [ce@patton.com](mailto:ce@patton.com)  
Web [www.patton.com](http://www.patton.com)

Patton is a registered trademark and the terms SmartNode, DownStreamQoS, and SessionRouter are trademarks of Patton Electronics Company in the United States and other countries.