



Enterprise Session Border Router with Transcoding

SmartNode™ 5400

The SN5400 is the perfect Session Border Router for Enterprises requiring Integrated Access, Universal SIP trunking and Transcoding services inside a single platform

Enterprise Session Border Router with Transcoding

Enables up to 64 transcoding sessions between codecs

Secure Enterprise

Enable VPN, NAT/NAPT, Access Control Lists with Downstream QoS to ensure the most efficient use of your bandwidth

IP Routing

RIP v1/v2, VRRP, policy based routing, loopback interface

Universal Interface support for WAN

Support for G.SHDSL, PRI and Gigabit Ethernet interfaces for your WAN needs

VPN Tunnels

Standard IPsec with AH and ESP ensures maximum protection when traversing unsecured networks.

Configurable Security Profiles

Built-in IP address and IP port filtering, ACLs and DoS attack detection creates a comprehensive security environment.

Universal SIP trunking service lets businesses with PBXs use VoIP and other real-time media communications over an end-to-end IP connection. The SmartNode 5400 connects the Enterprise's LAN to an Internet telephony service provider (ITSP), creating a single conduit for multimedia components including voice, video and data.

The SN5400 includes SIP-aware NAT and access controlled lists (ACLs) for maintaining secure communications when SIP traffic crosses the Enterprise edge.

The SN5400 enables IP-based data routing for enterprises in need of a single integrated access device to support their IP data and voice connectivity needs. Routing capabilities include RIP v1/v2, virtual router redundancy protocol (VRRP), Loopback interfaces as well as advanced techniques like policy based routing (PBR).

The SN5400 enables transcoding for up to 64 sessions. As VoIP becomes more popular in Enterprise deployments, more VoIP traffic within Enterprise LANs will be

uncompressed as a result of more available bandwidth whereas that traffic on the WAN will be compressed to save bandwidth. SN5400 transcoding between any VoIP codecs enables this optimal utilization of transport network at both sides of the Enterprise border.

The SN5400 provides advanced features like NAT/ NAPT in addition to ACLs and PBR for security and QoS that keep malicious traffic from effecting bandwidth requirements of PBR-marked essential traffic. Downstream QoS ensures important voice and fax calls don't get bogged down by such resource hungry lower priority TCP traffic as FTP downloads.

Whether you connect to your service provider using G.SHDSL or via a PRI connection, the SN5400 provides a single integrated platform for all your connectivity needs. You could also use the Gigabit Ethernet port to connect to an all IP-based service provider.

Visit www.patton.com for more information.




Application Diagram

The SN5400 enables Universal SIP Trunking and provides a single Integrated Access Device with features like IP Routing, Redundancy, Security and a SIP registrar for survivability.

In addition, the SN5400 enables Transcoding between two networks to most optimally support the bandwidth requirements. E.g. The internal of the network (LAN) could function on G.711 and the WAN side could then be on G.729 enabled by transcoding.

By using two SN5400 with VRRP enabled an Enterprise could connect to two ITSP and provide for failover in case the primary SIP provider trunk has a problem.

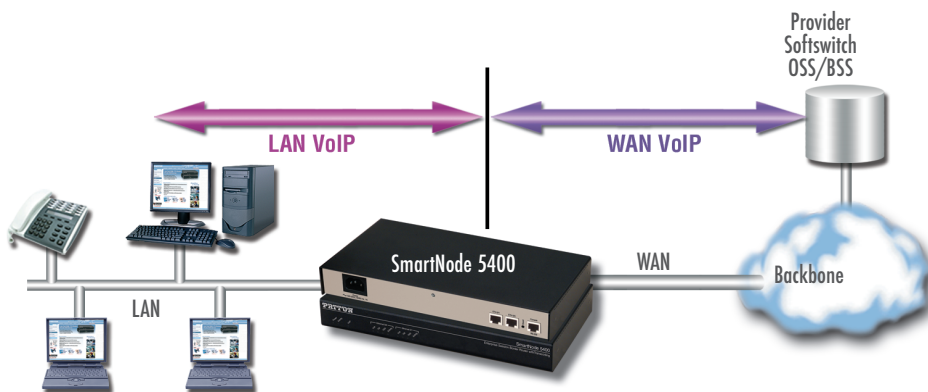

Specifications*

Capacity

128 Simultaneous Transcoding Sessions

Voice Connectivity

Signaling support (ISDN DSS-1, NI-2, Q.SIG, 5ESS, CAS Robbed bit loop and ground start, E&M, immediate, wink, double wink) • SIPv2, H.323v4 • ISDN AOC/ECT • ISDN speech, audio & data (Fax Gr 4, UDI 64, • RDI64) • ISDN supplementary Services

Voice processing

Codec G.711 a-law/mu-law, G.723, G.729ab, • G.726, G.727. T.38 fax relay (9.6 k, 14.4 k) • G.711 transparent fax and bypass • 128 ms echo cancellation

IP Routing

Complete IP access router • DHCP Client & server • Packet fragmentation • Static firewall, NAT, NAPT RFC 1631 access control lists

Quality of Service

Voice priority • DownStreamQoS™ • Traffic management, shaping and policing • IEEE 802.1p, TOS, DiffServ labeling • IEEE 802.1Q, VLAN tag insertion/deletion (4096 VLAN IDs, multiple VLAN support)

Management

Web/HTTP, CLI with local console and remote Telnet access • TFTP configuration & firmware loading • SNMP MIB II

and product MIB • Secure autoprovisioning for both firmware and unit/subscriber configuration • Built-in diagnostic tools (trace, debug, call generator)

Environment

Temp: 32–104°F (0–40°C)

Humidity: Up to 90% (non condensing)

Power: 100–240 VAC (50/60 Hz)

Power consumption

15W

Ordering Info

SN5400/32PG/UI: SmartNode Session Border Router, 2xGigabit Ethernet, 32 SIP-SIP calls with generic Transcoding or 64 SIP-SIP calls without Transcoding, 1 Pair G.SHDSL interface, Internal UI power

SN5400/64PG/UI: SmartNode Session Border Router, 2xGigabit Ethernet, 64 SIP-SIP calls with generic Transcoding or 128 SIP-SIP calls without Transcoding, 1 Pair G.SHDSL interface, Internal UI power

SN5400/32P2GS/EUI: SmartNode Session Border Router, 2xGigabit Ethernet, 32 SIP-SIP calls with generic Transcoding or 64 SIP-SIP calls without Transcoding, 2 Pair G.SHDSL interface, External UI power

SN5400/64P2GS/EUI: SmartNode Session Border Router, 2xGigabit Ethernet, 64 SIP-SIP calls with generic Transcoding or 128 SIP-SIP calls without Transcoding, 2 Pair G.SHDSL interface, External UI power

* Specifications subject to change without notice.

PATTON[®]
Let's Connect!™

07MSN5400-DS3

Patton is a registered trademark and the terms SmartNode, DownStreamQoS, and SessionRouter are trademarks of Patton Electronics Company in the United States and other countries.

Patton Electronics Co.
7622 Rickenbacker Drive
Gaithersburg, Maryland 20879
USA
Phone +1301975 1000
Fax +1301869 9293
E-mail sales@patton.com
Web www.patton.com

PE-Inalp Networks Private Ltd
Old No. 14 and New No.6,
Brahadambal Road,
Nungambakkam High Road
Chennai: 600 034, India
Phone +91 44 45490395/6/7
Fax +91 44 4549.0394
Email sales@patton.co.in
Web www.patton.co.in

Patton-Inalp Networks AG
Meriedweg 7
CH-3172 Niederwangen
Switzerland
Phone +41 (31) 985 25 25
Fax +41 (31) 985 25 26
E-mail sales@inalp.com
Web www.inalp.com