



# EtherBITS™ RS-485/422/232 Universal Device Server

## Model 2285

Control, monitor, and collect data from all your serial devices over the local network or Internet. Patton's Model 2285 universal single-port device server is cost-effective and feature-rich, linking virtually any serial RS-485/422/232 device to any IP network over a secure connection.

### User Selectable RS-485/422/232

Control, access, and monitor your asynchronous serial terminals and devices over the LAN

### Secure Communication

Security features include static key based RC4 data encryption, SSL, HTTPS, and IP filtering

### COM Port Redirector Software Included

Windows®—Tactical COM Port Redirector  
Linux-vtty drivers

### Standard TCP/IP Protocols Supported

ARP, ICMP, TCP, Raw TCP, UDP, DHCP, Telnet/SSH, HTTPS, DNS, Dynamic DNS, SNMP v1, & v2, SSL

### Connects Directly to the LAN

10/100Base-TX LAN connection via RJ-45 connects to any hub/switch

### Free Software Updates

Download new software via Patton's FTP site to internal FLASH memory

Use Patton's Model 2285 universal single-port device server to control, access, inter-connect, and manage RS-485/422/232 devices from any remote location as if you were there. Patton's device servers provide a new level of efficiency and affordability to a variety of application environments including industrial automation, health care, security, transportation, retail, and many others.

With built-in DHCP the Model 2285 automatically obtains an IP address and a subnet mask from the master server. With the IP address identified and the serial port attached, the Model 2285 can pass transparently pass data end-to-end using Telnet over TCP. Users can access management features over telnet, serial console, or the web. Security features include static key based RC4 data encryption, SSL to provide a secure

connection between client and server, HTTPS for secure data transfer over the network, and IP filter, which limits and controls access to the serial device. COM Port Redirector is included with Patton's 2285 enabling users to use their existing COM/TTY-based software, preventing the hassle and expense of investing in additional software.

The Patton Model 2285 provides physical-layer connectivity by a user selectable RS-485/422/232 serial port and 10/100Base-TX Ethernet port. Configure the serial port's data rate, ranging from 75 bps to 230 kbps, and choose from a variety of connector types including DB9 or DB25 male or female.

Easily and cost effectively bring serial devices onto one global or local area network!

Visit [www.patton.com](http://www.patton.com) for more information.



Built-in Patton know-how. We have been building interface conversion devices since 1984!


Serial connector:  
• DB-9 male or female  
• DB-25 male or female via cable

LEDs for monitoring Ethernet link and activity

Locking style barrel connector provides secure power connection

10/100Base-TX LAN port connects to Ethernet hub/switch

User-selectable serial RS-485/422/232 with async data rates up to 280 kbps


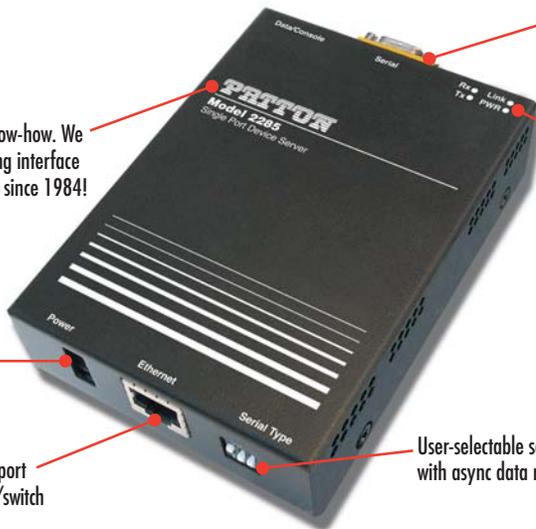


EtherBITS... Connect with confidence.



## Typical Applications

- ✓ The Patton Model 2285 connects various RS-485/422/232 serial devices to a central location over an Ethernet Local Area Network. The device server enables monitoring, controlling, management, and data collection.
- ✓ The Model 2285 enhances COM Port Redirection with the addition of encryption. Secure connections between the 2285 and the controller's COM port are implemented with the Serial/IP COM port redirector or OpenSSL Toolkit with an SSL security option.
- ✓ The Model 2285 performs Serial Data Tunneling when used in pairs. The 2285's will simulate a direct serial link between two serial devices over an Ethernet connection. Using IP allows the user to extend serial connections across the building or across the world.

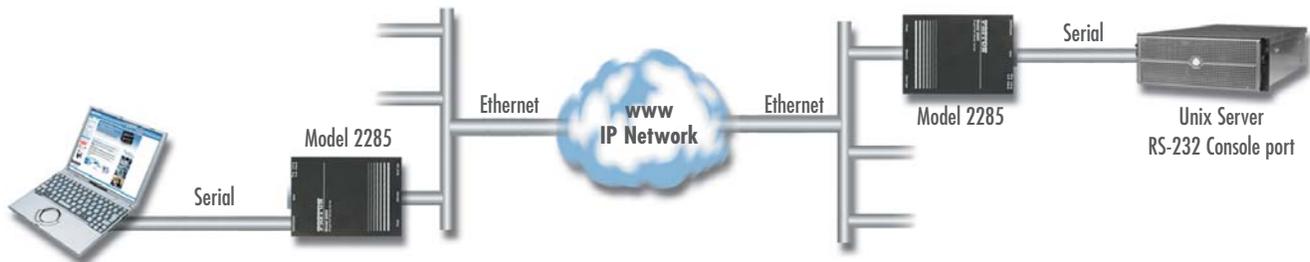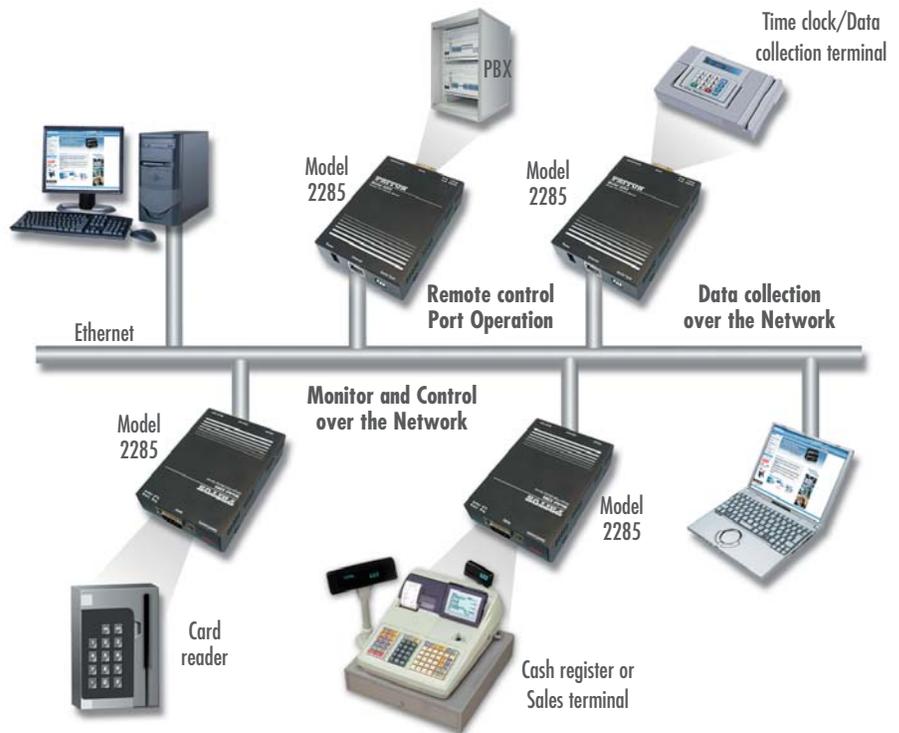

## Specifications

### Physical Interface

Serial: DB-9M/F; DB-25M/F; Ethernet: Shielded RJ-45

### Serial Transmission

RS-485,422, and 232 rates from 75 bps to 230 kbps (user selectable)

### Ethernet Transmission

10/100Base-TX

### Management

Monitoring, control, and diagnostics via serial port, TELNET session, or HTTP

### LED Indicators

Power, Ethernet Status, and Activity

### Power

External AC: 9-30 VDC, 300 mA at 9 VDC

### Compliance

EMC Directive 89/336/EEC, Low Voltage Directive 73/23/EEC; CE Mark

### Environment

Temperature: 40-122°F (5-50°C); Humidity: Up to 90% non-condensing

### Dimensions

4.5L x 3.2W x 1.0H in.  
(9.0L x 5.3W x 1.9H cm)

### Weight

Packaged: 1.05 lbs (0.46 kg);  
Unit only: 0.15 lbs (0.06 kg)

PE-Inalp Networks Private Ltd

An Associate of

**PATTON**  
Electronics Co., USA

Old No. 14 and New No.6,  
Brahadambal Road,  
Nungambakkam High Road  
Chennai: 600 034, India

Phone **+91 44 45490395/6/7**  
Fax **+91 44 4549.0394**  
Email **sales@patton.co.in**  
Web **www.patton.co.in**

Patton-Inalp Networks AG

**PATTON**  
inalp networks

Meriedweg 7  
CH-3172 Niederwangen  
Switzerland  
Phone **+41 (31) 985 25 25**  
Fax **+41 (31) 985 25 26**  
E-mail **sales@inalp.com**  
Web **www.inalp.com**

Patton Electronics Co.

**PATTON**  
Electronics Co.

7622 Rickenbacker Drive  
Gaithersburg, Maryland 20879  
USA  
Phone **+1 301 975 1000**  
Fax **+1 301 869 9293**  
E-mail **sales@patton.com**  
Web **www.patton.com**

07M2285-DS3

Patton is a registered trademark, and TrinityAE and Visuality are trademarks of Patton Electronics Company in the United States and other countries.