



Enterprise Session Border Controller

SmartNode™ 5200

The SmartNode™ 5200 is the perfect Session Border Controller for Enterprises requiring universal SIP trunking services for up to 32 SIP sessions.

IP Routing

RIP v1/v2, VRRP, Policy Based Routing, Loopback Interface

VPN Tunnels

Standard IPsec with AH and ESP ensures maximum protection when traversing unsecured networks.

Strong Encryption

DES, 3DES, and AES offer standards-based encryption algorithms from 56 to 256 bits.

QoS/CoS Profiles

Configurable burst tolerance, bandwidth guarantees plus reduce per flow traffic jitter as required by the application

Configurable Security Profiles

Built-in IP address and IP port filtering, ACLs and DoS attack detection creates a comprehensive security environment.

Enhanced IP services

DNS resolver and relay, NAT/NAPT, dynamic DNS, and DHCP server, ease integration.

10/100 Ethernet

One 10/100 WAN Ethernet port and four 10/100 LAN Ethernet ports

Universal SIP trunking service lets businesses with PBXs use VoIP and other real-time media communications over an end-to-end IP connection. The SmartNode 5200 connects the Enterprise's LAN to an Internet telephony service provider (ITSP), creating a single conduit for multimedia components including voice, video and data.

The SN5200 includes SIP-aware NAT and access controlled lists (ACLs) for maintaining secure communications when SIP traffic crosses the Enterprise edge.

The SN5200 enables IP-based data routing for enterprises in need of a single integrated access device to support their IP data and voice connectivity needs. Routing capabilities include RIP v1/v2, virtual router redundancy protocol (VRRP), Loopback interfaces as well as advanced techniques like policy based routing (PBR).

SN5200 provides advanced features like NAT/NAPT in addition to ACLs and PBR for security and QoS that keep malicious traffic from effecting bandwidth requirements of PBR-marked essential traffic. Downstream QoS ensures important voice and fax calls don't get bogged down by such resource hungry lower priority TCP traffic as FTP downloads.

SmartWare™ is equipped with a link status based routing function. This function, together with SIP registrar, enables survivable telephony services to be deployed between intra-office SIP clients in case there is a failure at the SIP provider. Combined with a PSTN fall-back scheme, the SN5200 is capable of routing calls over PSTN in the event of a SIP trunking provider problem.


Visit www.patton.com for more information.



Application Diagram

The SN5200 enables Universal SIP Trunking and provides a single Integrated Access Device with features like IP Routing, Redundancy, Security and a SIP registrar for survivability. The Enterprise can use a single conduit for both its voice and data traffic thus making the most cost effi-

cient use of its resources. By using two SN5200 with VRRP enabled an Enterprise could connect to two ITSP and provide for failover incase the primary SIP provider trunk has a problem.

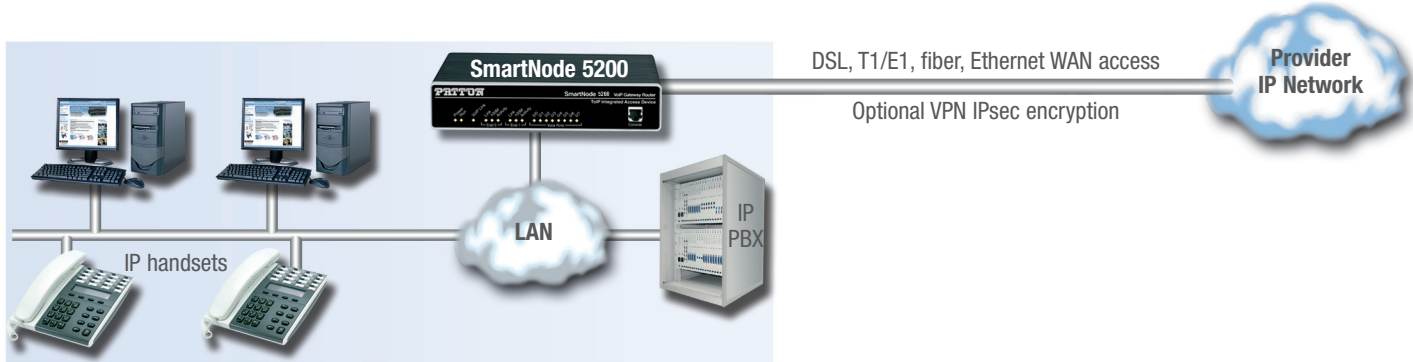

Specifications*

Capacity

32 Simultaneous SIP Sessions

Data Services

1 10/100BaseT WAN port, 4 10/100 LAN Ethernet Ports • Complete IP Access Router • DHCP Client & server • Packet Fragmentation • Static Firewall • NAT, NATP RFC 1631 Access Control Lists • DMZ Port

Quality of Service

Voice priority • DownStreamQoS™ • Traffic management, shaping and policing • IEEE 802.1p, TOS, DiffServ labeling •

IEEE 802.1Q, VLAN tag insertion/deletion (4096 VLAN IDs, multiple VLAN support

Voice Signaling

SIPV2 • SIP call transfer, redirect • DTMF in-band & out-of-band • All tones programmable (dial, ringing, busy)

Management

Web/HTTP, CLI with local console and remote Telnet access • TFTP configuration & firmware loading • SNMP MIB II and product MIB • Secure autoprovisioning for both firmware and unit/subscriber configuration • Built-in diagnostic tools (trace, debug, call generator)

Call Switching and Services

Regular expression based call routing and number manipulation • Number blocking • Short-dialing • Digit collection, distribution and hunt groups • transparent line extension

Voice Processing

CODEC G.711 a-law/mu-law, G.723, G.729ab • G.726, G.727. T.38 fax relay • G.711 transparent fax and bypass

System

CPU Motorola MPC875 @ 133 MHz • Memory 32MB SDRAM/8MB Flash

Dimensions

7.3W x 1.6H x 6.1D in.
(18.5H x 4.1W x 15.5D cm)

Weight

24.4 oz./400g

Power

100–240 VAC (50/60 Hz)

Temperature

32–104°F (0–40°C)

Humidity

5–80% (non condensing)

Ordering Info

SN5200/32B/EUI: SmartNode Enterprise Session Border Controller, 1x10/100Base-TX WAN, Integrated 4-port 10/100Base-TX LAN Switch; 32 SIP-to-SIP Calls without Transcoding, External UI Power

* Specifications subject to change without notice.

PE-Inalp Networks Private Ltd

An Associate of

PATTON
Electronics Co., USA

Old No. 14 and New No.6,
Brahadambal Road,
Nungambakkam High Road
Chennai: 600 034, India
Phone **+91 44 45490395/6/7**
Fax **+91 44 4549.0394**
Email **sales@patton.co.in**
Web **www.patton.co.in**

Patton-Inalp Networks AG

PATTON
Inalp networks

Meriedweg 7
CH-3172 Niederwangen
Switzerland
Phone **+41 (31) 985 25 25**
Fax **+41 (31) 985 25 26**
E-mail **sales@inalp.com**
Web **www.inalp.com**

Patton Electronics Co.

PE PATTON
Electronics Co.

7622 Rickenbacker Drive
Gaithersburg, Maryland 20879
USA
Phone **+1 301 975 1000**
Fax **+1 301 869 9293**
E-mail **sales@patton.com**
Web **www.patton.com**

07MSN5200-DS2

Patton is a registered trademark and the terms SmartNode, DownStreamQoS, and SessionRouter are trademarks of Patton Electronics Company in the United States and other countries.