


SmartNode™ Analog Telephone Adapter

SN100 Series

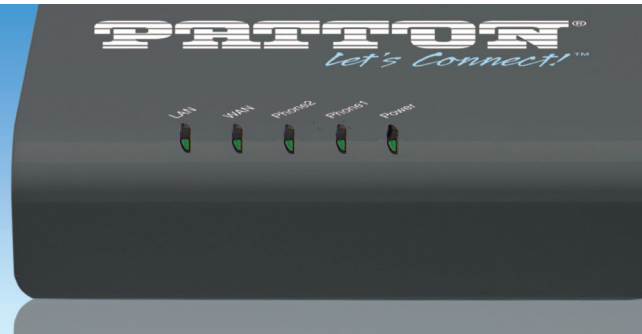

The SmartNode 100 series are cost effective, feature-rich ATAs that connect one or two standard telephones or fax machines to a computer/network to make VoIP calls using your broadband connection. There's no need to replace your existing analog telephones just because you want to enhance your phone system!

Analog interfaces

- 1 or 2 FXS
- FXS with FXO for fallback

Codecs

- G.711-ulaw, G711-alaw, G729, G723
- G.726: 16k / 24k / 32k / 40k bit/s (ADPCM)

Call Features

- Call Waiting, Call Transfer,
- Call Forward as Busy forward; Non-Answer forward; unconditional forward,
- Do-not-disturb (DND) support
- 3-way conferencing

Fax Modes


- T.38 relay support
- G.711 pass-through

The SmartNode 100 ATA series are feature-rich analog telephone adapters that enable you to connect standard telephones and make VoIP calls using your broadband connection. There is no need to replace your existing analog telephones just because you want to enhance your phone system.

Easy to install and simple to use, the SN100 series connects standard telephones or fax machines to any Voice over IP (VoIP) service provider.

Well equipped with at least one FXS RJ-11 phone interface, you can speak or fax as with the old fix net telephone. With small design you can easily place the adapter anywhere.

Contact us at sales@patton.com for more information.

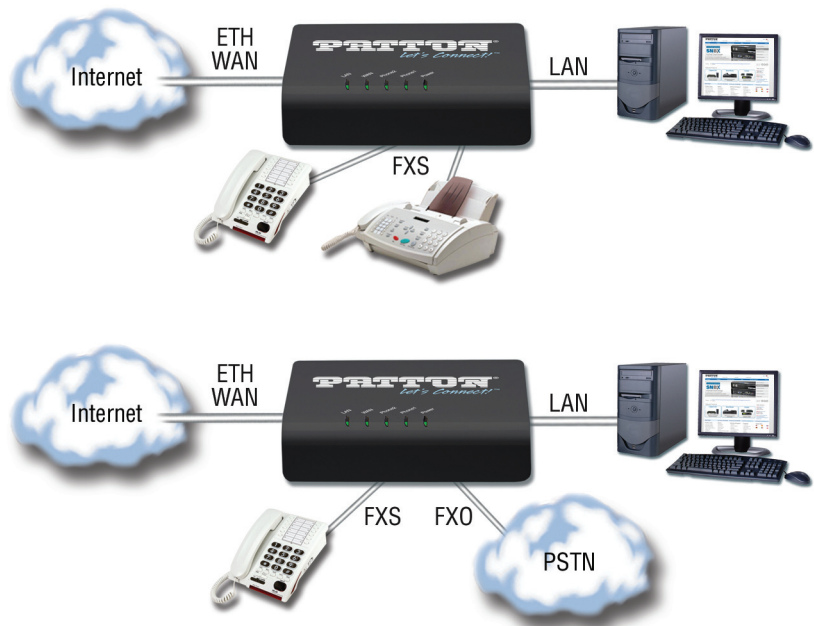

**Need More Ports?
Patton has a full line of
analog VoIP gateways!**



**SN4112S & SN4141
Analog Gateway**
2 to 8 FXS/FXO ports



SN4900 Analog Channel Bank
12, 16, 24 or 32 FXS/FXO ports

SmartNode™ 100 series VoIP ATAs



SN101



SN102

Specifications*

Telephone features

- G.711-ulaw
- G.711-alaw
- G.729
- G.723
- G.726: 16k / 24k / 32k / 40k bit/s (ADPCM)
- Call Waiting
- Call Transfer
- Call Forward as Busy forward; Non-Answer forward; unconditional forward
- Do-not-disturb (DND) support
- 3-way conferencing

DTMF Function

- RFC2833
- In-Band DTMF
- SIP Info

Fax Modes

- T.38 relay support
- G.711 pass-through

IP Specifications

- SIP (RFC 3261)
- SDP (RFC 2327)
- STUN (RFC3489)
- RTP Payload for DTMF Digits (RFC2833)

- SIP Session Timers (RFC 4028)
- DNS SRV (RFC 2782)
- Outbound Proxy Support
- SIP REFER method (RFC 3515)
- Media/Ringing Tone Generation (RFC 3960)
- Message Waiting Indicator (RFC 3842)

Call Features

- Adjustable Volume
- VAD/Dynamic Jitter Buffer
- Caller ID Generation: DTMF/FSK/NTT CID
- Peer-to-Peer Call by Dial Plan
- Different Country Tone Table Configuration

Network and Security

- WAN: PPPoE client, DHCP client, Fixed IP Address, PPTP
- QoS: DSCP/VLAN Tag
- PPTP/L2TP VPN Client
- NAT
- Port/IP/MAC Filter

Configuration/Management

- Web configuration interface; password protected

- Firmware upgrades through HTTP
- SNMP v1/v2 (Customization Project)
- IVR
- TR069 support with STUN
- Auto-Provision by HTTP/TFTP/FTP

Interfaces

- 1 x WAN 10/100BASE-TX
- 1 x LAN 10/100BASE-TX
- 1 x FXS (SN101)
- 2 x FXS (SN102)
- 1 x FXS/1 x FXO (SN102)
- 1 x Reset switch

Operating Temperature

- Operating Temperature: 0~40°C
- Storage Humidity: 10~90% relative humidity

Power

- AC: 100~240 VAC, 50/60 Hz
- DC: 12 VDC/1A

Dimensions and Weight

- 98mm x 86mm x 29mm
- 100g

Certifications

- CE, FCC, RoHS



Patton Electronics Co.
7622 Rickenbacker Drive
Gaithersburg, Maryland 20879, USA
Phone +1 301 975 1000
Fax +1 301 869 9293
E-mail sales@patton.com
Web www.patton.com

Patton-Inalp Networks AG
Meriedweg 7
CH-3172 Niederwangen, Switzerland
Phone +41 (31) 985 25 25
Fax +41 (31) 985 25 26
E-mail we@patton.com
Web www.patton.com

Patton Hungary Zrt
Gábor Dénes utca 4., Infopark Building C
Budapest H-1117, Hungary
Phone +36 1 439 4840
Fax +36 1 439 4844
E-mail ce@patton.com
Web www.patton.com

07MSN100_SERIES-DS1