


PATTON

VOIPReady™

powered by Broadvox & SmartNode

SIP Trunking, Legacy Integration at the Enterprise

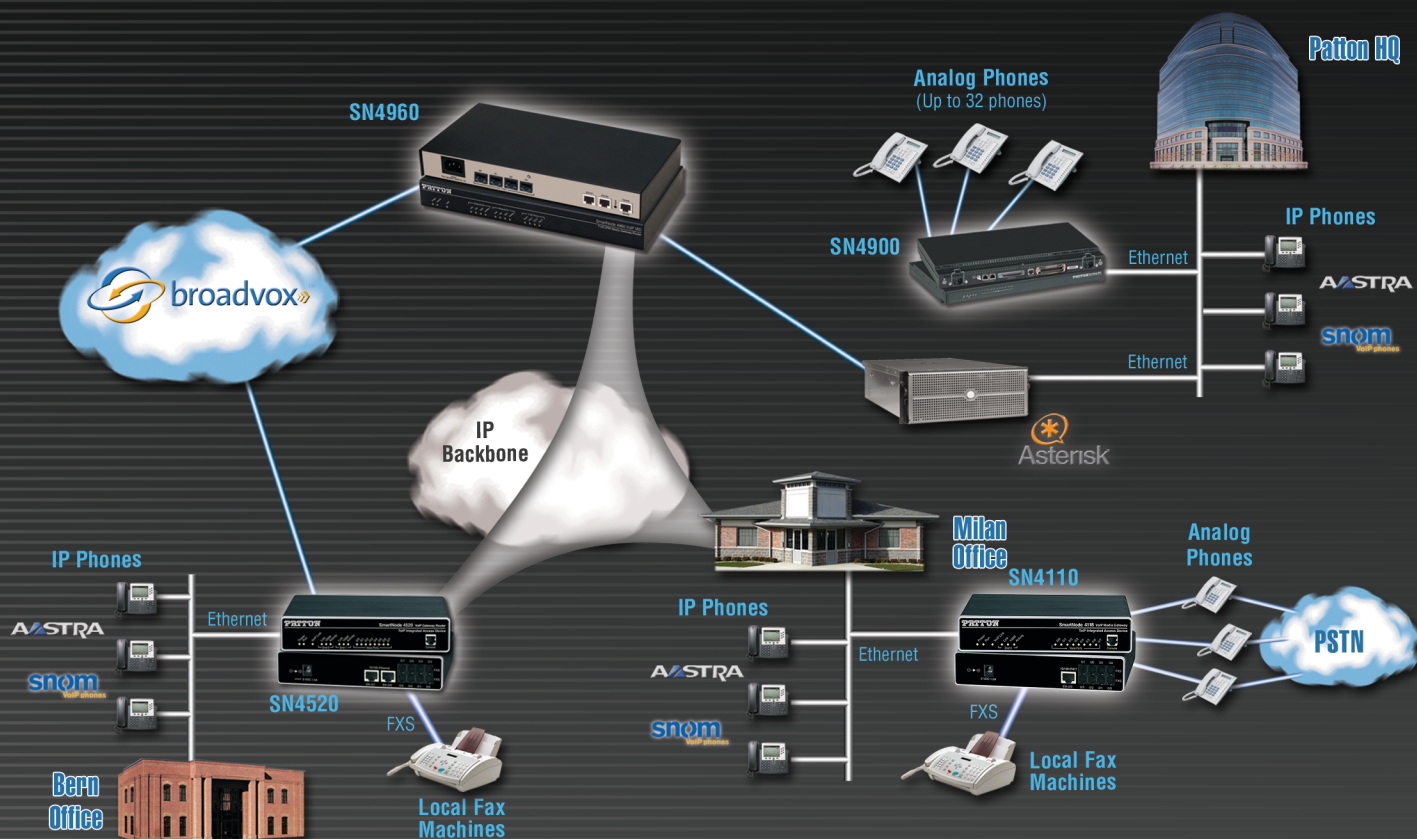

U.S. SMARTNODE VOIP SELECTION GUIDE

Telephony Interfaces	FXO	FXS/FXO		FXS or FXO	T1/E1/PRI		
SmartNode Model	M-ATA	SN4110	SN4520	SN4900	SN4940	SN4950	SN4960
Number of Telephony Ports	1	2, 3, 6, or 8	2, 4, 6, or 8	12, 16, 24, or 32	1 or 4	1 or 4	1 or 4
VoIP Call Capacity	1	2, 4, 6, or 8	2, 4, 6, or 8	12, 16, 24, or 32	up to 120	up to 120	up to 120
IP Router (IP Routing, QoS, VPN, etc.)	No	No	Yes	Yes	No	Yes	Yes
Ethernet Ports	1	1	2	2	1	2	2
WAN Access	No	No	No	(optional) Serial X.21 Serial V.35	No	(optional) G.SHDSL	G.SHDSL Serial X.21 Serial V.35
VoIP Border Controller (Interconnect multiple VoIP networks)	No	No	No	No	No	No	Yes

- Integrate SIP and legacy phone systems for VoIP SIP trunking
- Great voice and data survivability features
- Units include all IP routing, WAN access, and VoIP border controller functionality
- Protect your business with QoS and VPN for secure toll-quality voice communications
- Reliable, secure, and feature rich, SmartNode VoIP solutions are more than just talk.

**Contact ABP for more info
about this solution**